

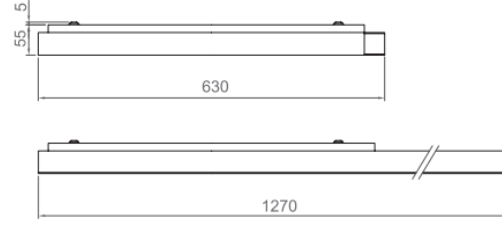


# Guide

## Indoor Lighting - Surface Mounted Lighting



Order Code	W	Lm	CCT	CRI	(LxH) (mm)	Kg
03114.66.30.039	35	3900	3000	Ra>80	630x1270x63 0x55	5,5
03114.66.40.041	35	4080	4000	Ra>80	630x1270x63 0x55	5,5

### TECHNICAL INFORMATION

<b>Housing</b>	Electrostatic coated steel sheet
<b>Optics</b>	Highly transmissive opal diffuser
<b>LED Lifetime</b>	50.000 hours
<b>L80B50</b>	
<b>Mounting System</b>	Surface

### OPTICAL SPECIFICATIONS

<b>Light Distribution</b>	Symmetrical
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	80
<b>Color Bin Value</b>	Mc Adams < 3
<b>Color Temperature (CCT)</b>	3000K/4000K

### ELECTRICAL

<b>Power (W)</b>	35W
<b>Power Factor</b>	>95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

### OPTIONAL

DALI  
Emergency Lighting Unit  
Tunable White

### ASSEMBLY

**Installation Type** Surface Mounted

