



# Guide

## Indoor Lighting - Surface Mounted Lighting

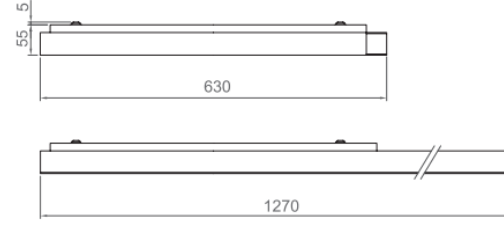

| Order Code      | W  | Lm   | CCT  | CRI   | (LxH)<br>(mm)       | Kg  |
|-----------------|----|------|------|-------|---------------------|-----|
| 03114.66.30.039 | 35 | 3900 | 3000 | Ra>80 | 630x1270x63<br>0x55 | 5,5 |
| 03114.66.40.041 | 35 | 4080 | 4000 | Ra>80 | 630x1270x63<br>0x55 | 5,5 |

### TECHNICAL INFORMATION

|                        |                                   |
|------------------------|-----------------------------------|
| <b>Housing</b>         | Electrostatic coated steel sheet  |
| <b>Optics</b>          | Highly transmissive opal diffuser |
| <b>LED Lifetime</b>    | 50.000 hours                      |
| <b>L80B50</b>          |                                   |
| <b>Mounting System</b> | Surface                           |

### OPTICAL SPECIFICATIONS

|                                |              |
|--------------------------------|--------------|
| <b>Light Distribution</b>      | Symmetrical  |
| <b>Light Output Angle</b>      | 120°         |
| <b>UGR Value</b>               | 80           |
| <b>Color Bin Value</b>         | Mc Adams < 3 |
| <b>Color Temperature (CCT)</b> | 3000K/4000K  |

### ELECTRICAL

|                      |                     |
|----------------------|---------------------|
| <b>Power (W)</b>     | 35W                 |
| <b>Power Factor</b>  | >95                 |
| <b>Light Source</b>  | SMD Mid Power LED   |
| <b>Cabling</b>       | Halogen-Free        |
| <b>Input Voltage</b> | 220-240V / 50-60 Hz |

### OPTIONAL

DALI  
Emergency Lighting Unit  
Tunable White

### ASSEMBLY

**Installation Type** Surface Mounted

