


# Orion

Indoor Lighting - Recessed Lighting

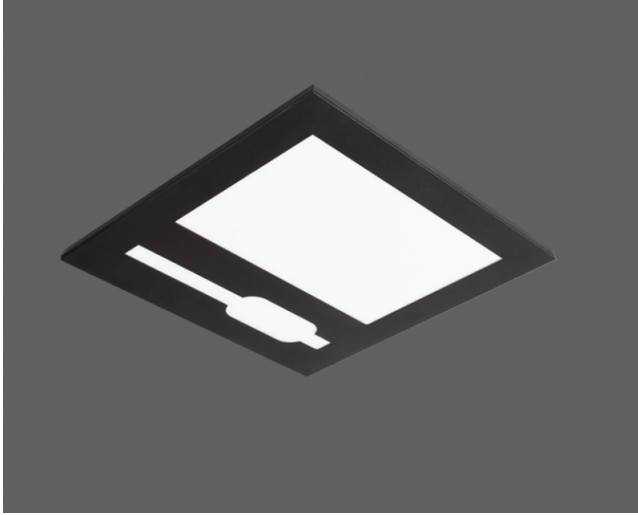

## TECHNICAL INFORMATION

<b>Housing</b>	Electrostatic coated steel sheet
<b>Optics</b>	Highly transmissive opal diffuser
<b>LED Lifetime</b>	50.000 hours
<b>L80B50</b>	
<b>Mounting System</b>	Recessed

## OPTICAL SPECIFICATIONS

<b>Light Distribution</b>	Symmetrical
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	80
<b>Color Bin Value</b>	Mc Adams < 3
<b>Color Temperature (CCT)</b>	3000K/4000K

## ELECTRICAL




<b>Power (W)</b>	9-31W
<b>Power Factor</b>	>95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

## OPTIONAL

DALI  
Emergency Lighting Unit  
Tunable White

## ASSEMBLY

**Installation Type** Under Plaster

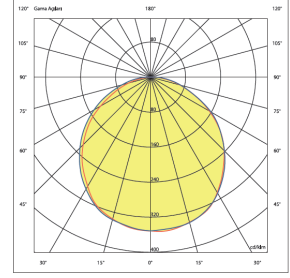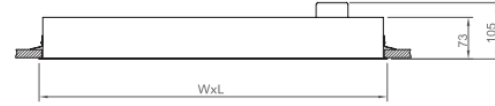

Order Code	W	Lm	CCT	CRI	WxLxHxH 2 (mm)	Ceiling Cutting (mm)	Kg
02120.33.30.008	9	800	3000	Ra>80	295x295x7 3x105	275x275	2,1
02120.33.40.009	9	850	4000	Ra>80	295x295x7 3x105	275x275	2,1
02121.66.30.032	31	3200	3000	Ra>80	595x595x7 3x105	575x575	4,1
02121.66.40.033	31	3300	4000	Ra>80	595x595x7 3x105	575x575	4,1

