


Orion

Indoor Lighting - Recessed Lighting

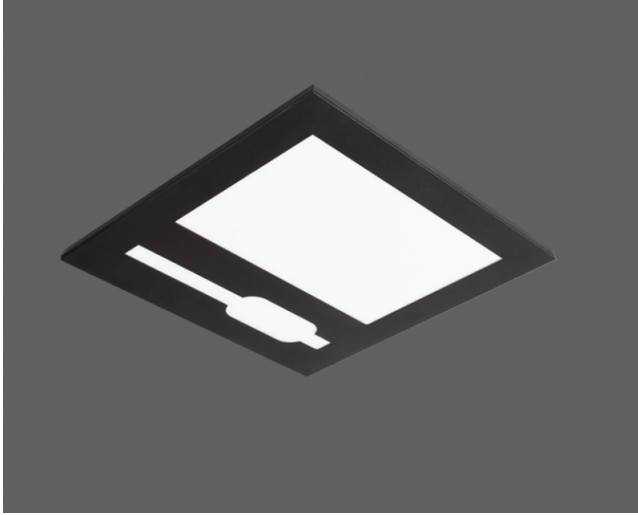

TECHNICAL INFORMATION

| | |
|------------------------|-----------------------------------|
| Housing | Electrostatic coated steel sheet |
| Optics | Highly transmissive opal diffuser |
| LED Lifetime | 50.000 hours |
| L80B50 | |
| Mounting System | Recessed |

OPTICAL SPECIFICATIONS

| | |
|--------------------------------|--------------|
| Light Distribution | Symmetrical |
| Light Output Angle | 120° |
| UGR Value | 80 |
| Color Bin Value | Mc Adams < 3 |
| Color Temperature (CCT) | 3000K/4000K |

ELECTRICAL



| | |
|----------------------|---------------------|
| Power (W) | 9-31W |
| Power Factor | >95 |
| Light Source | SMD Mid Power LED |
| Cabling | Halogen-Free |
| Input Voltage | 220-240V / 50-60 Hz |

OPTIONAL

DALI
Emergency Lighting Unit
Tunable White

ASSEMBLY

Installation Type Under Plaster

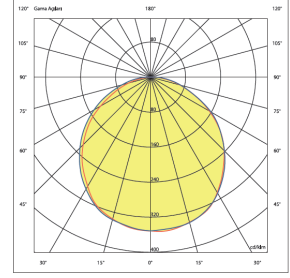

| Order Code | W | Lm | CCT | CRI | WxLxHxH 2 (mm) | Ceiling Cutting (mm) | Kg |
|-----------------|----|------|------|-------|--------------------|----------------------|-----|
| 02120.33.30.008 | 9 | 800 | 3000 | Ra>80 | 295x295x7 3x105 | 275x275 | 2,1 |
| 02120.33.40.009 | 9 | 850 | 4000 | Ra>80 | 295x295x7 3x105 | 275x275 | 2,1 |
| 02121.66.30.032 | 31 | 3200 | 3000 | Ra>80 | 595x595x7 3x105 | 575x575 | 4,1 |
| 02121.66.40.033 | 31 | 3300 | 4000 | Ra>80 | 595x595x7 3x105 | 575x575 | 4,1 |

