


RAL 7016


PLATE

09112

Simple Form, Powerful Performance

Plate is a durable wall-mounted luminaire we developed for outdoor applications. With its IP65 protection class, IK08 impact resistance, and cast aluminum housing, it offers long-lasting use in challenging environmental conditions. Its opal polycarbonate diffuser with a 120° wide light distribution provides homogeneous, comfortable, and safe lighting in entrance areas, building perimeters, corridors, and common areas. With its modern design and high durability, it brings both aesthetics and functionality to architectural outdoor projects.

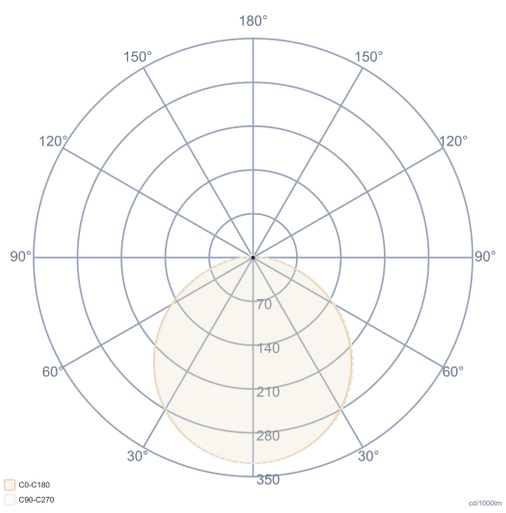

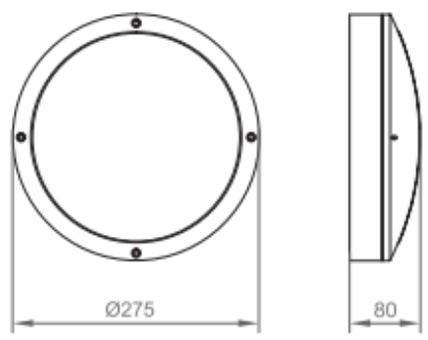

General Information	
Body & Frame	Cast Aluminum
Optics	Opal Diffuser
Gasket	Silicon
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø275 x 80mm
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	14-19W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Light Source	CCT	ØD x H (mm)	Kg
09112.27.30.010	14	900	3000	275x80	1,30
09112.27.40.011	14	1000	4000	275x80	1,30
09112.27.30.016	19	1150	3000	275x80	1,30
09112.27.40.017	19	1250	4000	275x80	1,30

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com