


RAL 9016

ESCAPE-Surface

80510

Escape is an exit and directional luminaire designed for safe evacuation guidance in emergency situations. Its transparent plexiglass panel and acrylic lens structure ensure clear and highly visible directional pictograms. With its modern design, it maintains architectural integrity while providing reliable guidance in emergencies. Thanks to its built-in battery system, it continues to operate even during power outages, preserving the visibility of escape routes.

With its polycarbonate body, lightweight construction, and double-sided use option, it is an essential component of safe evacuation systems in shopping malls, offices, hospitals, hotels, educational institutions, and all public buildings.

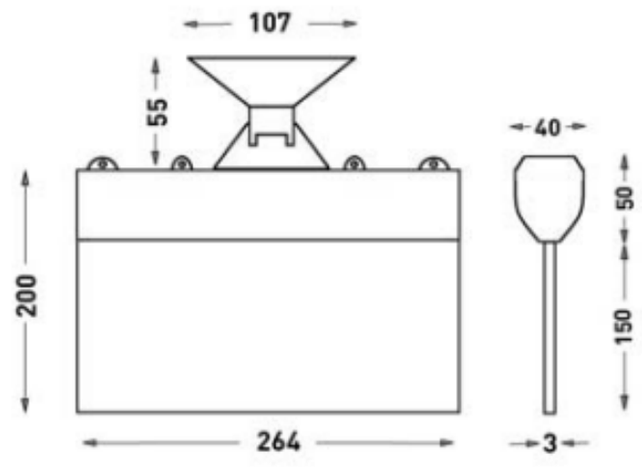

General Information	
Meterial	Polycarbonate and Hanger Tie
Frame	Foil Printed Acrylic Lens
Diffuser	Transparent Plexiglass
Insulation Class	Class II
Product Dimensions [mm]	264[W] x 200[L] x 40[H]
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	1.2W
Power Factor	>0.90
Light Source	SMD Mid Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current Output Rail Drive
Ambient Temperature	0°C / +40°C

Lighting Technology

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	How to use	Battery	WxHxL (mm)	Kg
80511.000.001-IK01	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.002-IK02	1.2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.003-IK03	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.004-IK04	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.005-IK05	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.006-IK06	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.007-IK07	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.008-IK08	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.009-IK09	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.010-IK10	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.011-IK11	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.012-IK12	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.013-IK13	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.014-IK14	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.015-IK16	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.016-IK16	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.017-IK17	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.018-IK18	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.019-IK19	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.020-IK20	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.021-IK21	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.022-IK22	1,2	20	Tek Yüzlü	3H	40x200x264	0,33

80511.000.023-IK23	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.024-IK24	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80512.000.001-IK01-IK02	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.003-IK03-IK04	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.005-IK05-IK06	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.007-IK07-IK08	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.009-IK09-IK10	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.011-IK11-IK12	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.013-IK13-IK14	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.015-IK15-IK16	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.017-IK17-IK18	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.019-IK19-IK20	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.021-IK21-IK21	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.022-IK22-IK23	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.024-IK24-IK24	1,2	20	Çift Yüzlü	3H	40x200x264	0,33

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com