

# Escape

Indoor Lighting - Emergency Lighting and Directional Luminaire



Colour Options



Ral 9016

## TECHNICAL INFORMATION

<b>Housing</b>	Polycarbonate and Hanger Tie
<b>Frame</b>	Foil Printed Acrylic Lens
<b>Diffuser</b>	Transparent Plexiglass
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

## ELECTRICAL


<b>Power (W)</b>	1.2W
<b>Power Factor</b>	>0.90
<b>Light Source</b>	SMD Mid Power LED
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output Rail Drive
<b>Ambient Temperature</b>	0°C / +40°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-I Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

## ASSEMBLY

<b>Installation Type</b>	Under Plaster, Surface Mounted
<b>Mounting Apparatus</b>	Metal Bracket

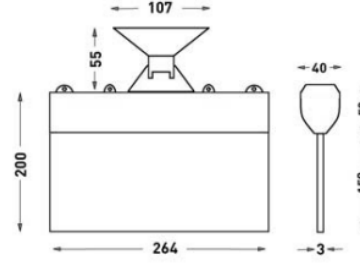

Order Code	W	Lm	How to use	Battery	WxHxL (mm)	Kg
80511.000.001-IK01	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.002-IK02	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.003-IK03	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.004-IK04	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.005-IK05	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.006-IK06	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.007-IK07	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.008-IK08	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.009-IK09	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.010-IK10	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.011-IK11	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.012-IK12	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.013-IK13	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.014-IK14	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.015-IK16	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.016-IK16	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.017-IK17	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.018-IK18	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.019-IK19	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.020-IK20	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.021-IK21	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.022-IK22	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.023-IK23	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80511.000.024-IK24	1,2	20	Tek Yüzlü	3H	40x200x264	0,33
80512.000.001-IK01-I K02	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.003-IK03-I K04	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.005-IK05-I K06	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.007-IK07-I K08	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.009-IK09-I K10	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.011-IK11-I K12	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.013-IK13-I K14	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.015-IK15-I K16	1,2	20	Çift Yüzlü	3H	40x200x264	0,33
80512.000.017-IK17-I	1,2	20	Çift Yüzlü	3H	40x200x264	0,33

K18							
80512.000.019-IK19-I K20	1,2	20	Çift Yüzlü	3H	40x200x264	0,33	
80512.000.021-IK21-I K21	1,2	20	Çift Yüzlü	3H	40x200x264	0,33	
80512.000.022-IK22-I K23	1,2	20	Çift Yüzlü	3H	40x200x264	0,33	
80512.000.024-IK24-I K24	1,2	20	Çift Yüzlü	3H	40x200x264	0,33	



Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkiizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. [www.ikizleraydinlatma.com](http://www.ikizleraydinlatma.com)

+90 (216) 397 22 16  
info@ikizleraydinlatma.com

