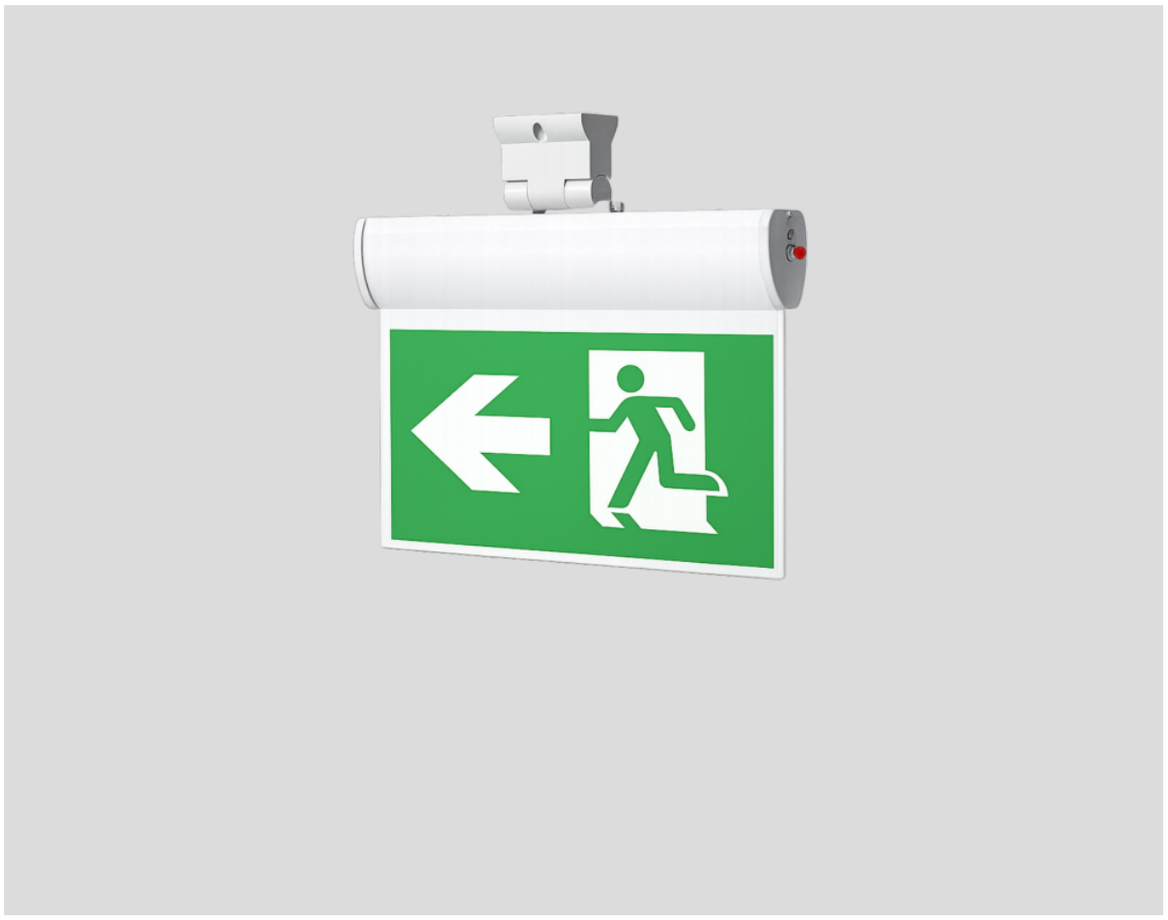



RUN

80311-80312

Flexible Mounting Emergency Exit Fixture

Run provides clear guidance for safe evacuation during emergencies. Featuring an anodized aluminum housing and a highly visible acrylic directional panel, it ensures that escape routes are easily and quickly identified. Its articulated mounting system adapts to various ceiling angles and installation conditions, allowing the directional panel to be adjusted to the desired position. This flexibility not only simplifies installation but also ensures that the directional signs are positioned for optimal visibility.

Equipped with an internal battery system that keeps it operational during power outages, Run is an ideal solution for safe evacuation scenarios in offices, shopping centers, hospitals, hotels, educational facilities, and public buildings.

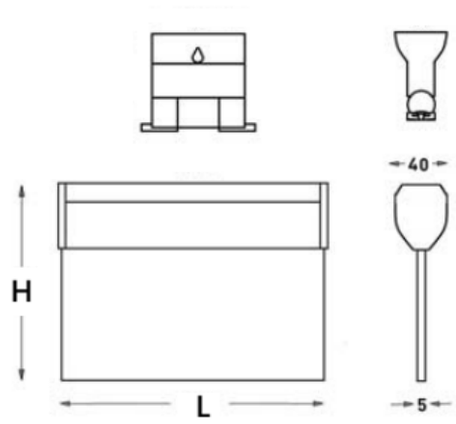

General Information	
Meterial	Aluminium
Frame	Foil Printed Acrylic Lens
Optics	Transparent Plexiglass
Paint	Anodizing
Side Cover	Policarbon
Insulation Class	Class II
Product Dimensions [mm]	40(W)x195/210(H)x265/300(L)
Mounting Type	Surface and Recessed
Mounting Part	Metal Bracket

Electrical Info	
Power	4,87W
Power Factor	>0.90
Light Source	SMD Mid Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current Output Rail
Ambient Temperature	0°C / +40°C

Lighting Technology
Optional
Emergency Test Button
2700K ~ 6500K
Battery Charge Indicator with Green LED

Order Code	W	How to use	Battery	WxHxL (mm)	Kg
80311.010.003-IK03	4,87	Tek Yüzlü	3H	40x195x265	0,665
80311.010.015-IK15	4,87	Tek Yüzlü	3H	40x195x265	0,665
80311.010.021-IK21	4,87	Tek Yüzlü	3H	40x195x265	0,665
80312.010.001-IK01-IK02	4,87	Çift Yüzlü	3H	40x195x265	0,665
80312.010.003-IK03-IK04	4,87	Çift Yüzlü	3H	40x195x265	0,665
80312.010.022-IK22-IK23	4,87	Çift Yüzlü	3H	40x195x265	0,665
80411.010.001.D-IK01	4,87	Tek Yüzlü	3H	40x210x300	0,800
80411.010.002.D-IK02	4,87	Tek Yüzlü	3H	40x210x300	0,800
80411.010.006.D-IK06	4,87	Tek Yüzlü	3H	40x210x300	0,800
80411.010.020.D-IK20	4,87	Tek Yüzlü	3H	40x210x300	0,800
80411.010.024.D-IK24	4,87	Tek Yüzlü	3H	40x210x300	0,800
80411.010.023.D-IK23	4,87	Tek Yüzlü	3H	40x210x300	0,800
80411.010.025.D-E2	4,87	Tek Yüzlü	3H	40x210x300	0,800
80412.010.002.D-IK01-IK02	4,87	Çift Yüzlü	3H	40x210x300	0,800
80412.010.025.D-E2-E2	4,87	Çift Yüzlü	3H	40x210x300	0,800

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com