

Run

Indoor Lighting - Emergency Lighting and Directional Luminaire



TECHNICAL INFORMATION

Housing	Aluminium
Frame	Foil Printed Acrylic Lens
Diffuser	Transparent Plexiglass
Paint	Anodizing
Side Cover	Polycarbon

OPTICAL SPECIFICATIONS

ELECTRICAL


Power (W)	4,87W
Power Factor	>0.90
Light Source	SMD Mid Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output Rail
Ambient Temperature	0°C / +40°C
LED Lifetime L80B50	>50.000 Hour
Battery	Ni-Cd

OPTIONAL

- Emergency Test Button	- Battery Charge Indicator with Green LED
- 2700K ~ 6500K	- Class-II Protection Class

ASSEMBLY

Installation Type	Under Plaster, Surface Mounted
Mounting Apparatus	Metal Bracket

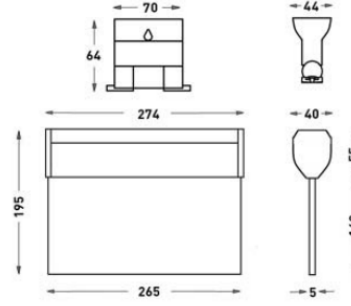

Order Code	W	How to use	Battery	WxHxL (mm)	Kg
80311.010.003-IK03	4,87	Tek Yüzlü	3H	40X195X265	0,665
80311.010.015-IK15	4,87	Tek Yüzlü	3H	40X195X265	0,665
80311.010.021-IK21	4,87	Tek Yüzlü	3H	40X195X265	0,665
80312.010.001-IK01-IK02	4,87	Çift Yüzlü	3H	40X195X265	0,665
80312.010.003-IK03-IK04	4,87	Çift Yüzlü	3H	40X195X265	0,665
80312.010.022-IK22-IK23	4,87	Çift Yüzlü	3H	40X195X265	0,665
80411.010.001.D-IK01	4,87	Tek Yüzlü	3H	40X210X300	0,800
80411.010.002.D-IK02	4,87	Tek Yüzlü	3H	40X210X300	0,800
80411.010.006.D-IK06	4,87	Tek Yüzlü	3H	40X210X300	0,800
80411.010.020.D-IK20	4,87	Tek Yüzlü	3H	40X210X300	0,800
80411.010.024.D-IK24	4,87	Tek Yüzlü	3H	40X210X300	0,800
80411.010.023.D-IK23	4,87	Tek Yüzlü	3H	40X210X300	0,800
80411.010.025.D-E2	4,87	Tek Yüzlü	3H	40X210X300	0,800
80412.010.002.D-IK01-IK02	4,87	Çift Yüzlü	3H	40X210X300	0,800
80412.010.025.D-E2-E2	4,87	Çift Yüzlü	3H	40X210X300	0,800

