

RAL 9016


SHEER


82110

Surface - Uninterruptible Emergency Lighting

Sheer is an LED emergency lighting fixture designed to support safe evacuation during power outages. Its integrated battery system, compact design, and high-visibility optics provide reliable lighting in emergencies. It adapts to different application needs with continuous or intermittent operation options.

It is suitable for use in offices, hotels, hospitals, shopping malls, educational facilities, and public buildings. With its performance and easy installation, it is an effective solution for emergency lighting systems.

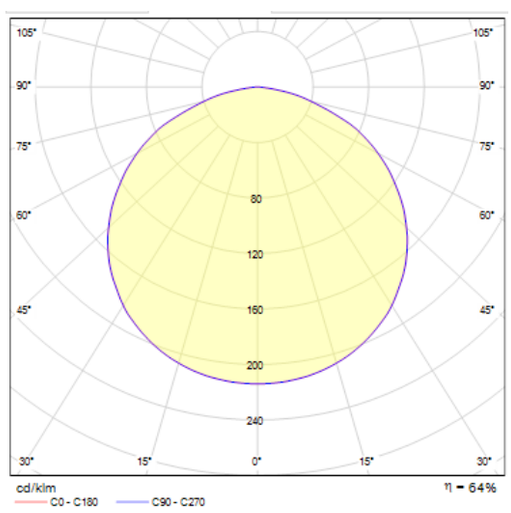

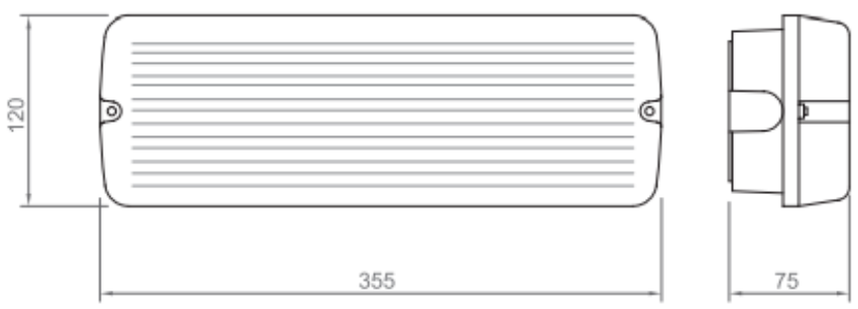

General Information	
Housing	Polycarbonate
Diffuser	Acrylic Lens
Insulation Class	Class II
Product Dimensions [mm]	120(W) x 355(L) x 75(H)
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	1-2W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current Output Rail
Ambient Temperature	-20°C / +40°C

Lighting Technology	
UGR Value	UGR ≤ 19
CRI [Ra]	CRI ≥ 80

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Mode of Operation	Battery	WxLxH (mm)	Kg
82110.010.000	1	120	Sürekli	3H	75x120x350	0,45
82110.011.000	2	130	Kesintide	3H	75x120x350	0,45

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com