

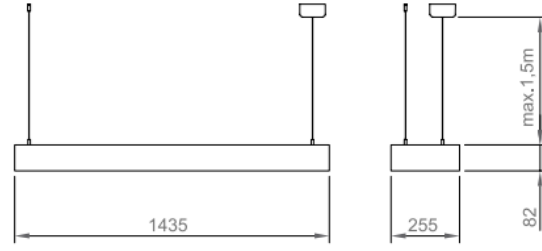


Grus Gamma

Indoor Lighting - Pendant Lighting

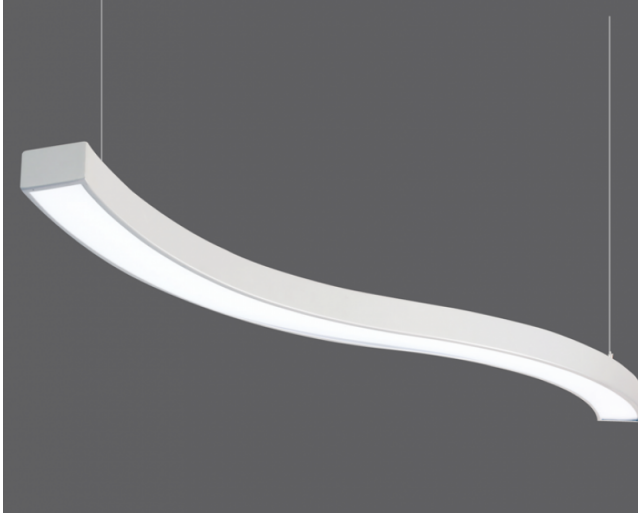

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
06114.14.30.049	54	4900	3000	Ra>80	255x1435x82	3.0
06114.14.40.051	54	5100	4000	Ra>80	255x1435x82	3.0

TECHNICAL INFORMATION

Housing	Extruded aluminum profile with electrostatic coating
Optics	Highly transmissive opal diffuser
LED Lifetime L80B50	50.000 hours
Mounting System	Surface / Pendant

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL

Power (W)	54W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Pendant

