

ANGEL


01140


Architectural Circular Pendant Lighting Luminaire

The ANGEL Series creates a light and modern look in any space with its hollow ring form and simple design language. Thanks to its circular structure that provides homogeneous light distribution, it offers decorative and comfortable lighting, while standing out as a strong design element in architectural projects.

With its aluminum body and slim profile details, ANGEL offers a minimalist aesthetic, adapting to contemporary spatial arrangements in offices, social areas, and commercial projects. With its pendant mounting structure, different diameter options, and control alternatives, custom lighting scenarios can be created for each project.

RAL 9016 RAL 9005 RAL 9006

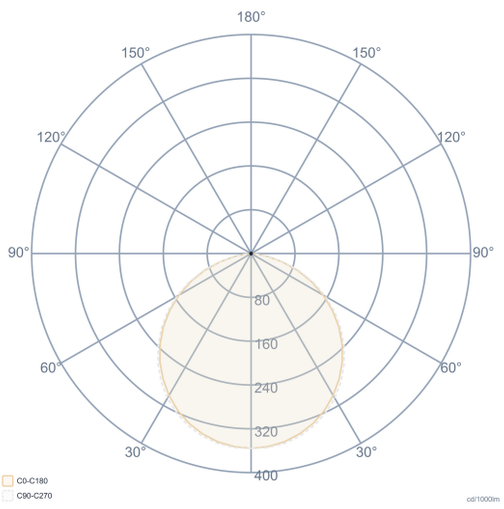

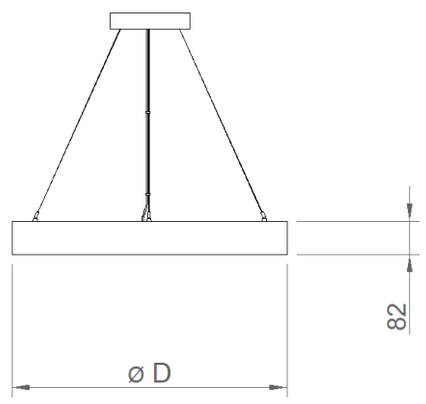

General Information	
Meterial	Aluminum Extruded
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø600/900/1200x82(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	40-120W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
01140.60.30.037	40	3200	3000	Ø600x82	3,00
01140.60.40.039	40	3400	4000	Ø600x82	3,00
01140.60.30.051	60	4800	3000	Ø600x82	3,00
01140.60.40.054	60	5040	4000	Ø600x82	3,00
01140.90.30.055	60	4275	3000	Ø900x82	4,50
01140.90.40.058	60	4500	4000	Ø900x82	4,50
01140.90.30.077	90	7700	3000	Ø900x82	4,50
01140.90.40.081	90	8150	4000	Ø900x82	4,50
01140.12.30.057	60	5760	3000	Ø1200x82	6,00
01140.12.40.061	60	6100	4000	Ø1200x82	6,00
01140.12.30.102	120	10270	3000	Ø1200x82	6,00
01140.12.40.108	120	10870	4000	Ø1200x82	6,00

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com