

# Angel 1200

Indoor Lighting - Pendant Lighting



## Colour Options



Ral 9016

Ral 9006

Ral 9005

## TECHNICAL INFORMATION

**Housing** Extruded Aluminum Profile  
**Diffuser** High Transmittance Opal Diffuser  
**Paint** Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

**Optics** Symmetrical  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 22  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL



**Power (W)** 60-120W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- AC-DC Supply(MBS)

## ASSEMBLY

**Installation Type** Pendant  
**Mounting Apparatus** Height Adjustable Steel Wire

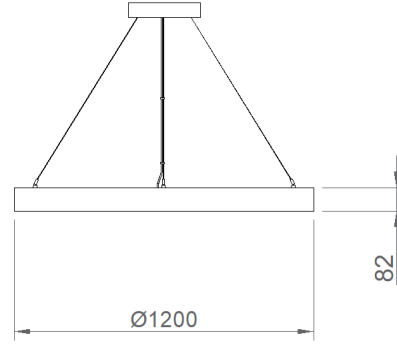

Order Code	W	Lm	CCT	CRI	ØxH (mm)	Kg
01140.12.30.057	60	5760	3000	Ra>80	Ø1200x82	6,0
01140.12.40.061	60	6100	4000	Ra>80	Ø1200x82	6,0
01140.12.30.102	120	10270	3000	Ra>80	Ø1200x82	6,0
01140.12.40.108	120	10870	4000	Ra>80	Ø1200x82	6,0

