


U-Line

Indoor Lighting - Pendant Lighting



Colour Options

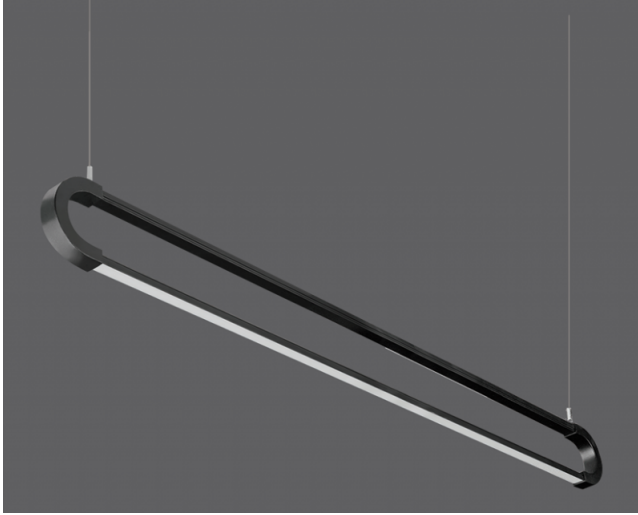

TECHNICAL INFORMATION

Housing Extruded Aluminum Profile
Diffuser High Transmittance Opal Diffuser
Paint Electrostatic Powder Painted
Dimensions(mm) 24(W) x 95(H)

OPTICAL SPECIFICATIONS

Optics Direct-Indirect
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 36W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Pendant
Mounting Apparatus Height Adjustable Hanging Wire

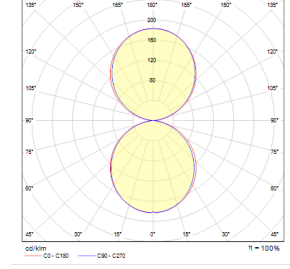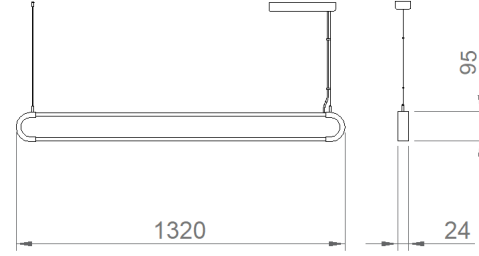

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01131.13.30.035	36	3500	3000	Ra>80	1320	1.4
01131.13.40.036	36	3600	4000	Ra>80	1320	1.4

