


# U-Line

Indoor Lighting - Pendant Lighting



Colour Options

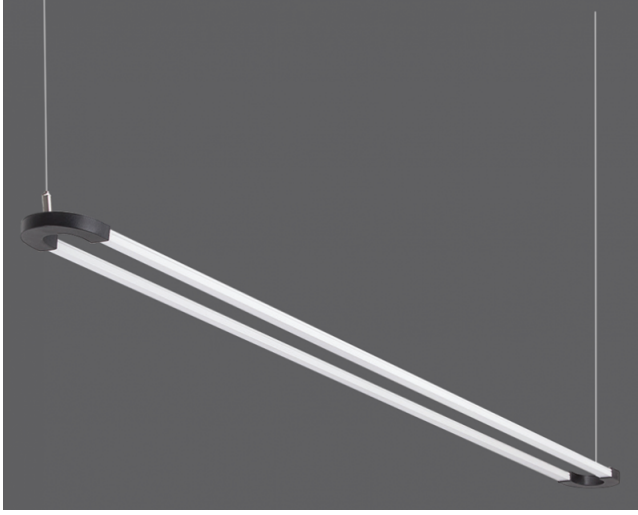

## TECHNICAL INFORMATION

**Housing** Extruded Aluminum Profile  
**Diffuser** High Transmittance Opal Diffuser  
**Paint** Electrostatic Powder Painted  
**Dimensions(mm)** 95(W) x 24(H)

## OPTICAL SPECIFICATIONS

**Optics** Direct  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 22  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL

**Power (W)** 36W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour




## OPTIONAL

- DALI  
- Tunable White  
- CRI > 90  
- Different RAL Color Options  
- Class-II Protection Class

- 1-10V DIM  
- Emergency Lighting Unit  
- 2700K ~ 6500K  
- Plug-in Energy Input Connector  
- AC-DC Supply(MBS)

## ASSEMBLY

**Installation Type** Pendant  
**Mounting Apparatus** Height Adjustable Hanging Wire

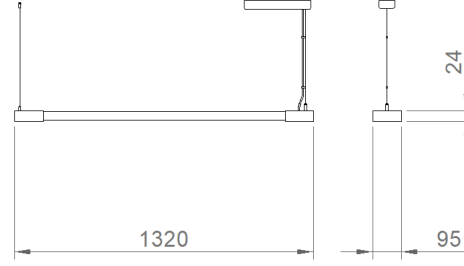

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01132.13.30.035	36	3500	3000	Ra>80	1320	1.4
01132.13.40.036	36	3600	4000	Ra>80	1320	1.4

