


# U-Line

Indoor Lighting - Pendant Lighting



## Colour Options

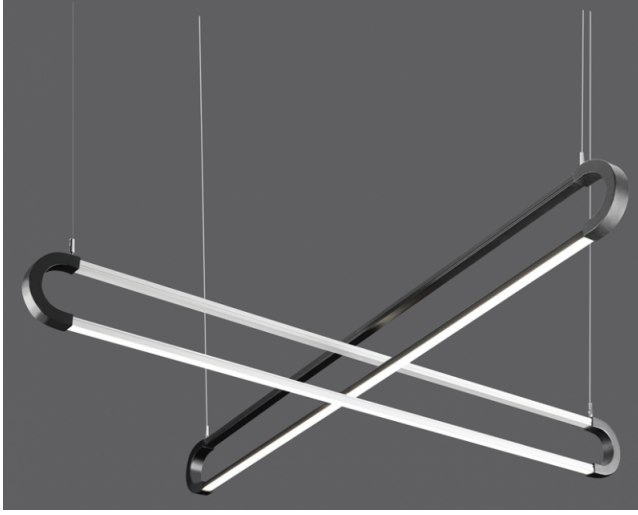

## TECHNICAL INFORMATION

**Housing** Extruded Aluminum Profile  
**Diffuser** High Transmittance Opal Diffuser  
**Paint** Electrostatic Powder Painted

## OPTICAL SPECIFICATIONS

**Optics** Direct - Indirect  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 22  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL



**Power (W)** 72W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabbling** Halogen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

- DALI  
- Tunable White  
- CRI > 90  
- Different RAL Color Options  
- Class-II Protection Class  
- 1-10V DIM  
- Emergency Lighting Unit  
- 2700K ~ 6500K  
- Plug-in Energy Input Connector  
- AC-DC Supply(MBS)

## ASSEMBLY

**Installation Type** Pendant  
**Mounting Apparatus** Height Adjustable Hanging Wire

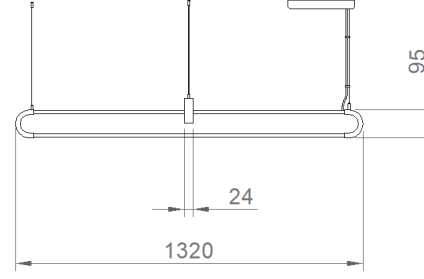

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01135.13.30.070	72	7000	3000	Ra>80	1320	2.8
01135.13.40.072	72	7200	4000	Ra>80	1320	2.8



reddot award 2015  
winner lighting design

