


U-Line

Indoor Lighting - Pendant Lighting



Colour Options

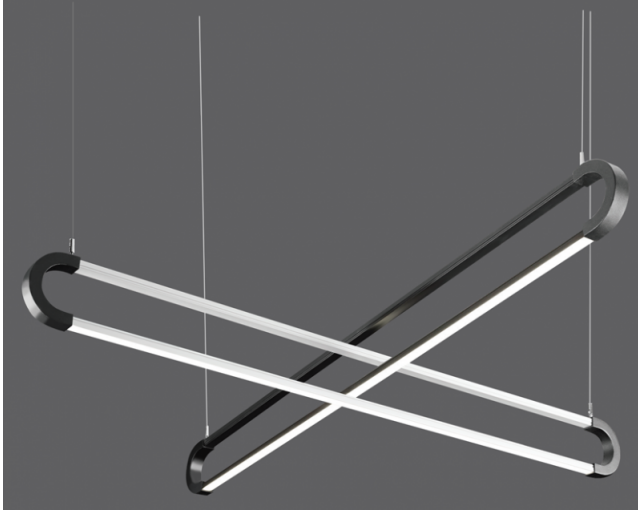

TECHNICAL INFORMATION

Housing Extruded Aluminum Profile
Diffuser High Transmittance Opal Diffuser
Paint Electrostatic Powder Painted

OPTICAL SPECIFICATIONS

Optics Direct - Indirect
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL

Power (W) 72W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabbling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour



OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class

- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Pendant
Mounting Apparatus Height Adjustable Hanging Wire

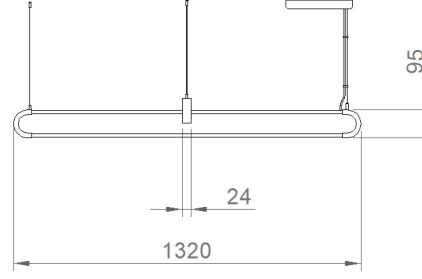

| Order Code | W | Lm | CCT | CRI | L (mm) | Kg |
|-----------------|----|------|------|-------|--------|-----|
| 01135.13.30.070 | 72 | 7000 | 3000 | Ra>80 | 1320 | 2.8 |
| 01135.13.40.072 | 72 | 7200 | 4000 | Ra>80 | 1320 | 2.8 |



reddot award 2015
winner lighting design

