

RAL 9006

U-LINE 01136


01136


Architectural Direct/Indirect Pendant Lighting Luminaire

The U-Line Series offers a decorative and modern lighting solution with its open form and unique design language. Its U-shaped structure creates a light and architectural look in the space, while providing balanced lighting by combining direct and indirect light effects.

With its anodized aluminum body and simple design details, it adds an aesthetic character to contemporary projects. It stands out as a strong design element in office, commercial, and social areas. It adapts to specific lighting scenarios, offering both functional and decorative lighting.



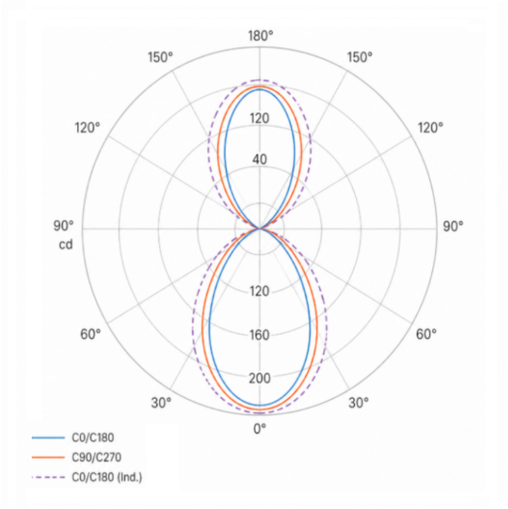

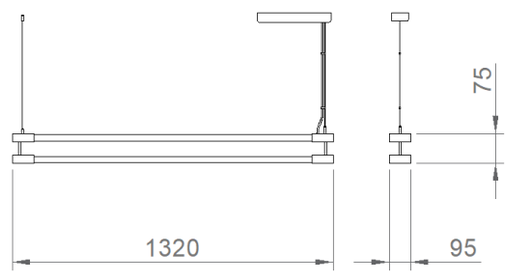

General Information	
Meterial	Aluminum Anodized
Optics	Opal Diffuser
Paint	Electrostatic Powder Painted
Insulation Class	Class I
Product Dimensions [mm]	95(W) x 75(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Hanging Wire

Electrical Info	
Power	72W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120° (Direct/Indirect)
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg	Direct	Indirect
01136.13.30.070	72	7000	3000	1320	2.80	50 %	50 %
01136.13.40.072	72	7350	4000	1320	2.80	50 %	50 %

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com