

# Lightline - 075

Indoor Lighting - Linear Lighting



## Colour Options



## TECHNICAL INFORMATION

<b>Housing</b>	Extruded Aluminum Profile
<b>Side Cover</b>	Metal Cover
<b>Diffuser</b>	Highly Transmissive Opal Diffuser
<b>Paint</b>	Electrostatic Powder Paint
<b>Dimensions(mm)</b>	75(W) x 82(H)

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL



<b>Power (W)</b>	15-62W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

## ASSEMBLY

**Installation Type** Under Plaster

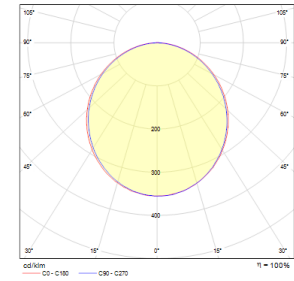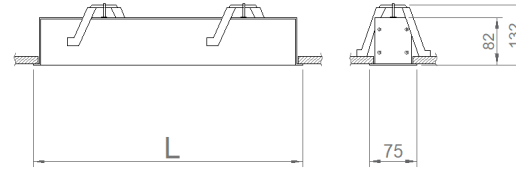

Order Code	W	Lm	CCT	CRI	L (mm)	Ceiling Cutting (mm)	Kg
02155.71.30.015	15	1270	3000	Ra>80	590	65x580	0,9
02155.71.40.016	15	1350	4000	Ra>80	590	65x580	0,9
02155.71.30.021	21	1660	3000	Ra>80	590	65x580	0,9
02155.71.40.022	21	1750	4000	Ra>80	590	65x580	0,9
02155.71.30.023	22	2050	3000	Ra>80	870	65x860	1,4
02155.71.40.024	22	2160	4000	Ra>80	870	65x860	1,4
02155.71.30.032	31	2595	3000	Ra>80	870	65x860	1,4
02155.71.40.033	31	2730	4000	Ra>80	870	65x860	1,4
02155.71.30.031	29	2365	3000	Ra>80	1150	65x1140	1,9
02155.71.40.032	29	2490	4000	Ra>80	1150	65x1140	1,9
02155.71.30.043	42	3580	3000	Ra>80	1150	65x1140	1,9
02155.71.40.044	42	3770	4000	Ra>80	1150	65x1140	1,9
02155.71.30.038	36	3300	3000	Ra>80	1430	65x1420	2,3
02155.71.40.039	36	3900	4000	Ra>80	1430	65x1420	2,3
02155.71.30.053	52	4750	3000	Ra>80	1430	65x1420	2,3
02155.71.40.055	52	5500	4000	Ra>80	1430	65x1420	2,3
02155.71.30.046	44	4010	3000	Ra>80	1710	65x1700	2,75
02155.71.40.048	44	4800	4000	Ra>80	1710	65x1700	2,75
02155.71.30.064	62	5640	3000	Ra>80	1710	65x1700	2,75
02155.71.40.066	62	5940	4000	Ra>80	1710	65x1700	2,75



Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.  
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.  
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. [www.ikizleraydinlatma.com](http://www.ikizleraydinlatma.com)

+90 (216) 397 22 16  
info@ikizleraydinlatma.com

