

LIGHTLINE-075


02155


Recessed Linear Lighting Luminaire

The Lightline 75 Series offers homogeneous and comfortable lighting with its wide profile structure and diffuser-based optical system. Thanks to its opal diffuser, it provides a soft and balanced light distribution, enhancing visual comfort, while its recessed mounting design creates an integrated and simple look on architectural surfaces.

Its structure, suitable for linear lighting configurations, allows for solutions in X, Y, and various geometric forms. With different power, color temperature, and control options, it adapts to project-specific applications. It stands out as an integrated and aesthetic lighting solution in office, commercial, and architectural spaces.

RAL 9016 RAL 9005 RAL 9006

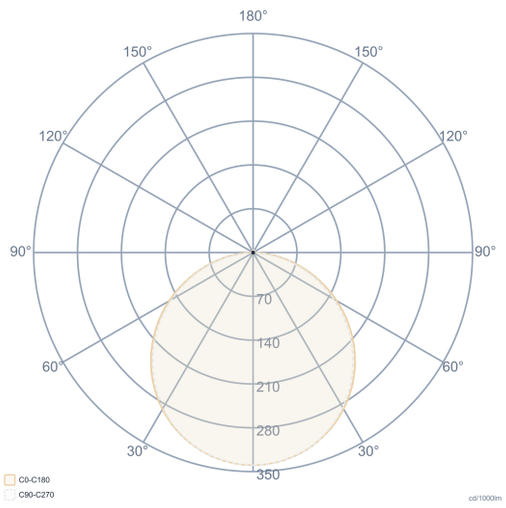

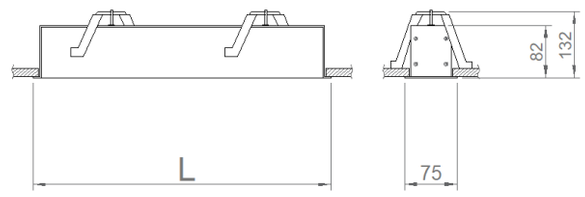

General Information	
Meterial	Aluminum Extruded
Side Cover	Metal Cover
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	75(W) x 82(H)
Mounting Type	Recessed
Mounting Part	Metal Bracket

Electrical Info	
Power	15-62W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit
Different RAL Color Options

Order Code	W	Lm	CCT	L (mm)	Ceiling Cutting (mm)	Kg
02155.71.30.015	15	1270	3000	590	65x580	0,90
02155.71.40.016	15	1350	4000	590	65x580	0,90
02155.71.30.021	21	1660	3000	590	65x580	0,90
02155.71.40.022	21	1750	4000	590	65x580	0,90
02155.71.30.023	22	2050	3000	870	65x860	1,40
02155.71.40.024	22	2160	4000	870	65x860	1,40
02155.71.30.032	31	2595	3000	870	65x860	1,40
02155.71.40.033	31	2730	4000	870	65x860	1,40
02155.71.30.031	29	2365	3000	1150	65x1140	1,90
02155.71.40.032	29	2490	4000	1150	65x1140	1,90
02155.71.30.043	42	3580	3000	1150	65x1140	1,90
02155.71.40.044	42	3770	4000	1150	65x1140	1,90
02155.71.30.038	36	3300	3000	1430	65x1420	2,30
02155.71.40.039	36	3900	4000	1430	65x1420	2,30
02155.71.30.053	52	4750	3000	1430	65x1420	2,30
02155.71.40.055	52	5500	4000	1430	65x1420	2,30
02155.71.30.046	44	4010	3000	1710	65x1700	2,75
02155.71.40.048	44	4800	4000	1710	65x1700	2,75
02155.71.30.064	62	5640	3000	1710	65x1700	2,75
02155.71.40.066	62	5940	4000	1710	65x1700	2,75

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com