


# Lightline - 058

Indoor Lighting - Linear Lighting, Surface Mounted Lighting



## Colour Options

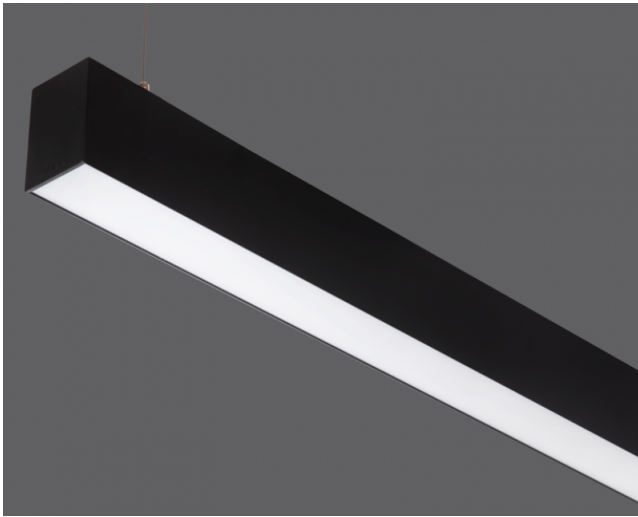

## TECHNICAL INFORMATION

<b>Housing</b>	Extruded Aluminum Profile
<b>Side Cover</b>	Aluminum Injection
<b>Diffuser</b>	Highly Transmissive Opal Diffuser
<b>Dimensions(mm)</b>	58(W) x 82(H)
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL



<b>Power (W)</b>	15-62W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL


- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

## ASSEMBLY

<b>Installation Type</b>	Surface Mounted, Pendant
<b>Mounting Apparatus</b>	Height Adjustable Steel Wire

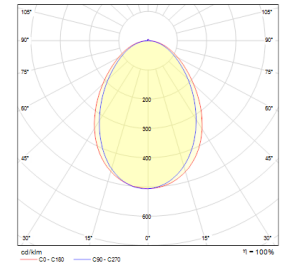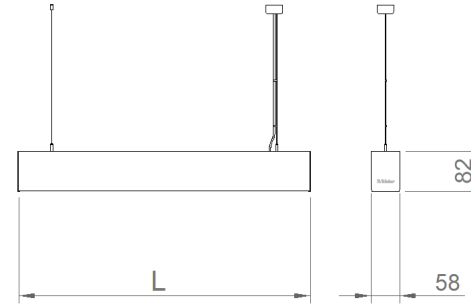

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.57.30.015	16	1450	3000	Ra>80	575	1,3
01180.57.40.016	16	1570	4000	Ra>80	575	1,3
01180.57.30.021	21	1680	3000	Ra>80	575	1,3
01180.57.40.022	21	1770	4000	Ra>80	575	1,3
01180.57.30.023	22	1950	3000	Ra>80	855	2,0
01180.57.40.024	22	2075	4000	Ra>80	855	2,0
01180.57.30.032	31	2700	3000	Ra>80	855	2,0
01180.57.40.033	31	2800	4000	Ra>80	855	2,0
01180.57.30.031	29	2400	3000	Ra>80	1135	2,7
01180.57.40.032	29	2500	4000	Ra>80	1135	2,7
01180.57.30.043	42	3900	3000	Ra>80	1135	2,7
01180.57.40.044	42	4200	4000	Ra>80	1135	2,7
01180.57.30.038	36	3200	3000	Ra>80	1415	3,2
01180.57.40.039	36	3350	4000	Ra>80	1415	3,2
01180.57.30.053	52	4750	3000	Ra>80	1415	3,2
01180.57.40.055	52	5050	4000	Ra>80	1415	3,2
01180.57.30.046	43	3900	3000	Ra>80	1695	3,7
01180.57.40.048	43	4100	4000	Ra>80	1695	3,7
01180.57.30.064	62	5640	3000	Ra>80	1695	3,7
01180.57.40.066	62	5900	4000	Ra>80	1695	3,7

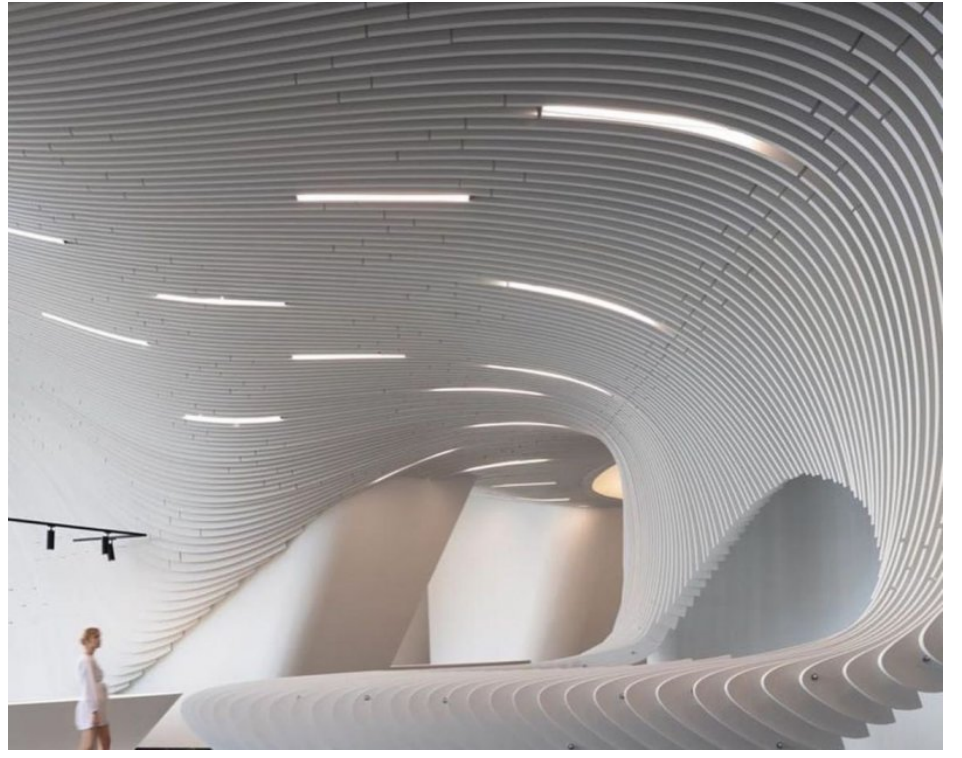

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.  
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.  
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. [www.ikizleraydinlatma.com](http://www.ikizleraydinlatma.com)

+90 (216) 397 22 16  
info@ikizleraydinlatma.com

