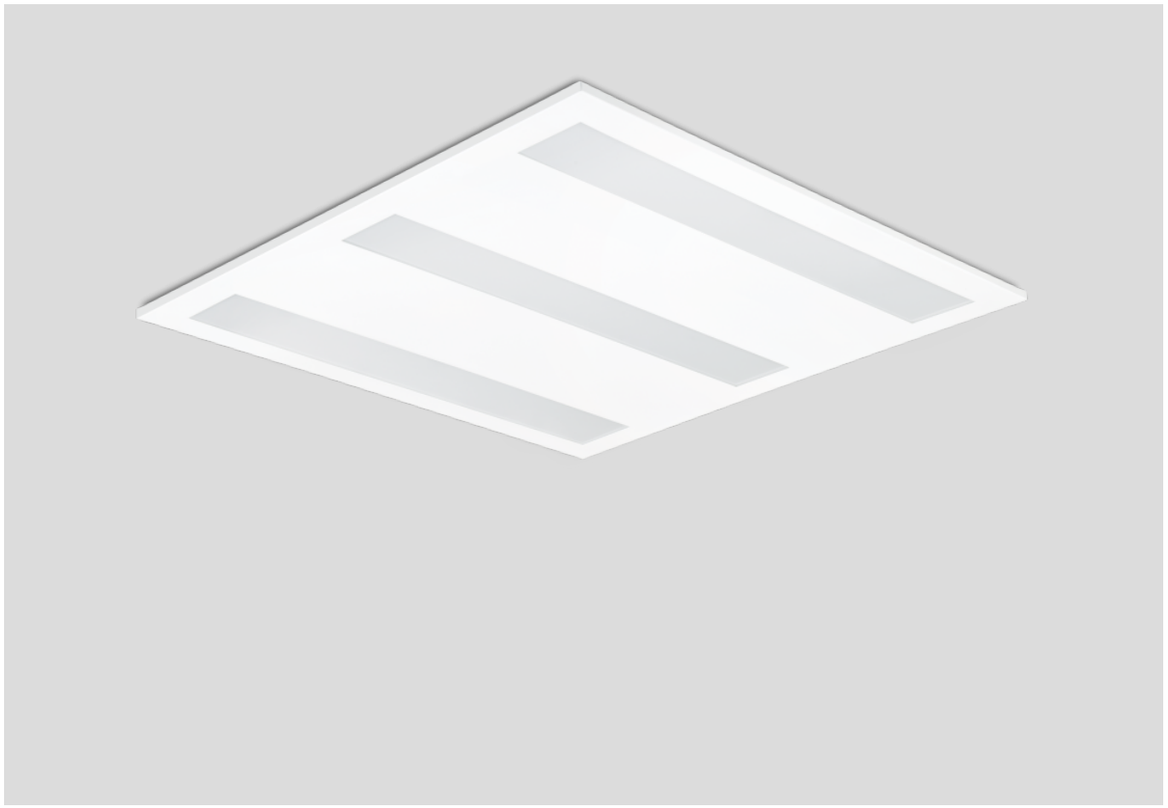


PART-G

02150


Linear Lighting, Modern Comfort


Part G reinterprets traditional lighting concepts with modern LED technology through its slim body structure and linear light windows on the front surface.

Drawing attention with its minimalist design, Part G provides an integrated and simple look to the ceiling thanks to its compatibility with modular ceiling systems. The light windows positioned on the front surface add a characteristic lighting effect to the space while supporting energy savings with high-efficiency LED technology.

Ideal for offices, educational buildings, healthcare facilities, and commercial spaces, Part G combines aesthetic appearance with functional lighting.

RAL 9016 RAL 9006

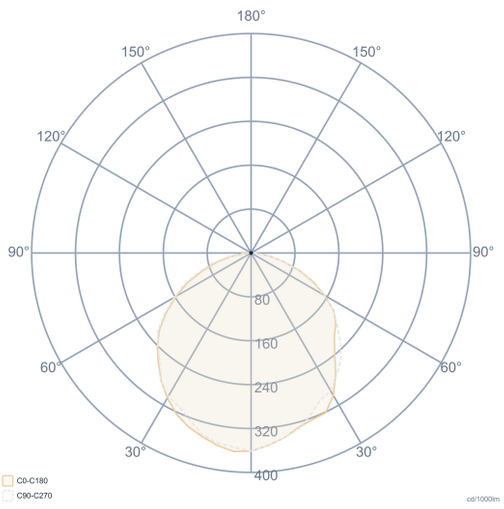

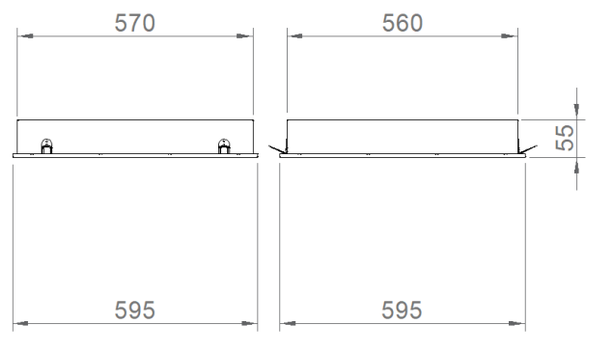

General Information		Electrical Info		Lighting Technology	
Housing	DKP Metal Sheet	**Power**	29-41W	**Light Output Angle**	120°
Optics	Opal Diffuser	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Paint	Electrostatic Powder Paint	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Insulation Class	Class I	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Product Dimensions [mm]	595(W) x 595(L) x 55(H)	**Input Voltage**	220-240V AC / 50-60 Hz		
Mounting Type	Recessed	**LED Driver**	Constant Current		
Mounting Part	Metal Bracket	**Ambient Temperature**	-20°C / +50°C		
		LED Lifetime L70	>102.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02150.66.30.022	29	2890	3000	595x595x73	575x575	3,90
02150.66.40.023	29	2450	4000	595x595x73	575x575	3,90
02150.66.30.031	41	3300	3000	595x595x73	575x575	3,90
02150.66.40.032	41	3520	4000	595x595x73	575x575	3,90

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com