

DOME-G


02115


Direct Performance, Indirect Comfort

The Dome G Series combines direct and indirect lighting in a single unit, offering a balanced and comfortable lighting solution for modern interiors. The central lighting surface with an opal diffuser provides a homogeneous and soft distribution of direct light, while the indirect light outlets on the sides direct light towards the ceiling, creating a spacious and comfortable atmosphere.

Thanks to its flush-mounted design, its simple appearance integrates seamlessly with the ceiling, and its balanced light distribution makes it an ideal solution for offices, educational buildings, healthcare facilities, and commercial spaces. Bringing together the efficiency of direct lighting with the comfort of indirect lighting, Dome G combines aesthetics and performance in modern architectural projects.

RAL 9016 RAL 9006

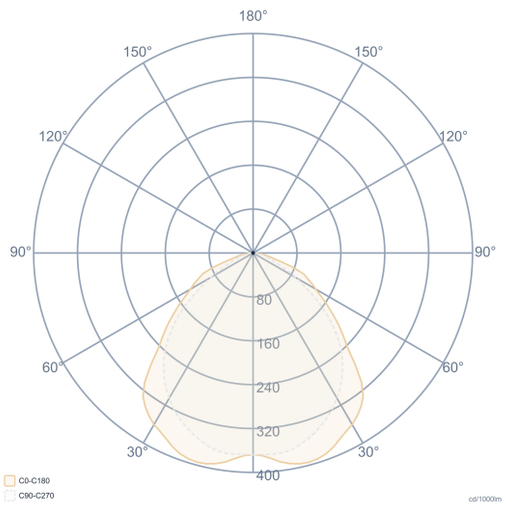

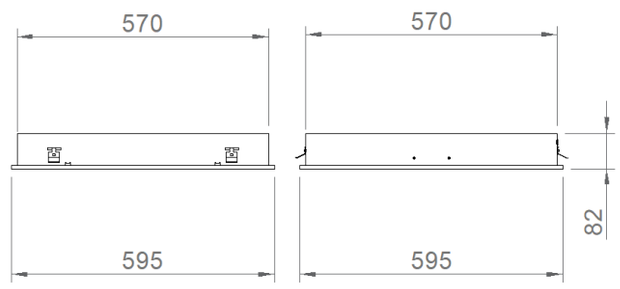

General Information	
Body & Frame	DKP Metal Sheet
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	595(W) x 595(L) x 82(H)
Mounting Type	Recessed
Mounting Part	Metal Bracket

Electrical Info	
Power	29-60W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 19
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02115.66.30.023	29	1980	3000	595x595x80	575x575	4,70
02115.66.40.024	29	2120	4000	595x595x80	575x575	4,70
02115.66.30.031	41	2680	3000	595x595x80	575x575	4,70
02115.66.40.042	41	2890	4000	595x595x80	575x575	4,70
02115.66.30.052	60	3560	3000	595x595x80	575x575	4,70
02115.66.40.056	60	3600	4000	595x595x80	575x575	4,70

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com