

DROP IP65

05378


IP65 Compact Spotlight


Drop IP65 is a professional spotlight with a high protection rating, developed to provide reliable lighting in humid and dusty environments. Thanks to its IP65 protection level, it offers resistance to water splashes and dust, while its compact design combines aesthetics and functionality in architectural projects.

Its aluminum injection-molded body and frame structure, metallized optical reflector, and glass-protected optical system ensure long-lasting and efficient use. It is the solution for bathrooms, washrooms, spa centers, hotels, corridors, healthcare facilities, and other indoor applications requiring IP protection.

CE · IK 03 · GLOW WIRE 650°C · IP 65 · RoHS COMPLIANT

RAL 9016

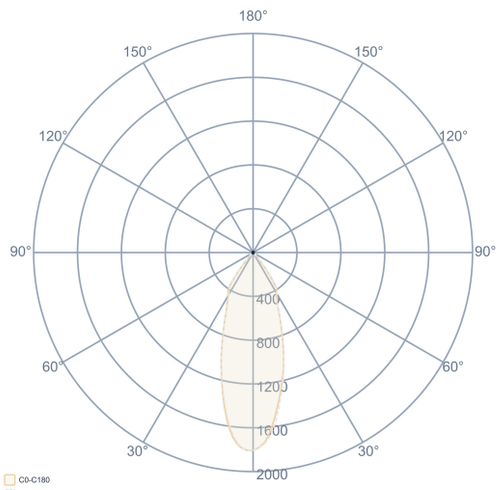

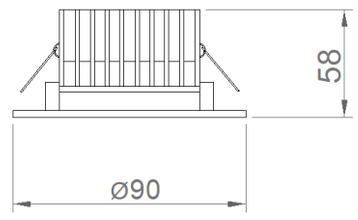

General Information	
Body & Frame	Aluminum Injection
Optics	Polished Reflector + Glass
Paint	Electrostatic Powder Coating
Insulation Class	Class II
Product Dimensions [mm]	Ø90x58(H)
Mounting Type	Recessed
Mounting Part	Steel Spring

Electrical Info	
Power	7-12W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	35°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05378.90.30.007	7	800	35°	3000	90x58	Ø75	0,60
05378.90.40.007	7	850	35°	4000	90x58	Ø75	0,60
05378.90.30.010	12	1180	35°	3000	90x58	Ø75	0,60
05378.90.40.010	12	1245	35°	4000	90x58	Ø75	0,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com