

Beam D

Outdoor Lighting - Outdoor Sconce



Colour Options



Ral 7016

TECHNICAL INFORMATION

Housing	Cast Aluminum
Reflector	Polished Aluminum
Glass	Tempered, Clear Glass Diffuser
Paint	RAL 7016 Anthracite

OPTICAL SPECIFICATIONS

Light Distribution	Direct-Indirect
Light Output Angle	43°
UGR Value	UGR ≤ 25
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	2x13
Power Factor	>0.95
Light Source	COB LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- 2700K ~ 6500K	- CRI > 90
- Different RAL Color Options	- Plug-in Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted

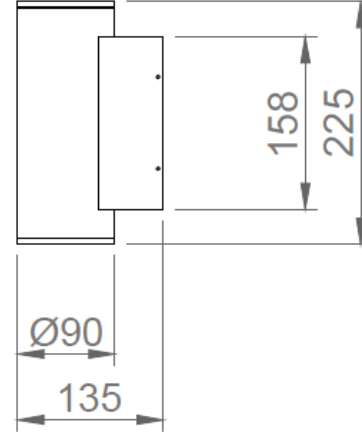

Order Code	W	Lm	CCT	CRI	ØxHxL (mm)	Kg
06602.91.30.022	2x13	2x810	3000	Ra>80	90x225x135	1,8
06602.91.40.023	2x13	2x1035	4000	Ra>80	90x225x135	1,8

