

Cruse

Indoor Lighting - Appliques



TECHNICAL INFORMATION

Housing	Electrostatic powder painted aluminium
Optics	Opal polycarbonate diffuser
LED Lifetime	50.000 hours
L70B50	
Mounting System	Surface

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	80
Effectiveness Factor	88 Lm/W
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K


ELECTRICAL

Power (W)	4W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

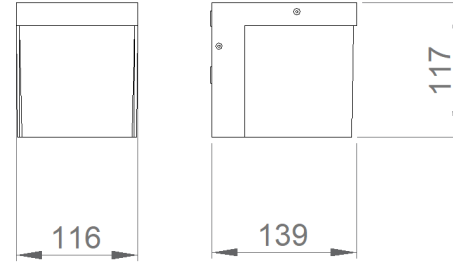

Order Code	W	Lm	CCT	CRI	WxLxH (mm)
06605.11.30.004	4	380	3000	Ra>80	139x116x117
06605.11.40.004	4	400	4000	Ra>80	139x116x117

