

Laminar

Indoor Lighting - Appliques



TECHNICAL INFORMATION

Housing Paint Electrostatic powder painted aluminium
Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Light Distribution Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3


ELECTRICAL

Power (W) 6W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

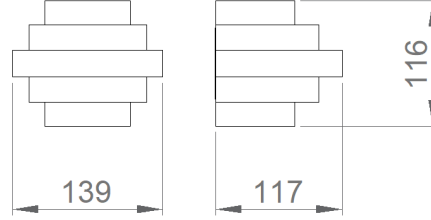

Order Code	W	Lm	CCT	CRI	WxLxH (mm)
06604.11.30.004	6	400	3000	Ra>80	139x116x117
06604.11.40.005	6	500	4000	Ra>80	139x116x117

