

# Laminar

Indoor Lighting - Appliques



## TECHNICAL INFORMATION

**Housing Paint** Electrostatic powder painted aluminium  
Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

**Light Distribution** Symmetrical  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 22  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3


## ELECTRICAL

**Power (W)** 6W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

## ASSEMBLY

**Installation Type** Surface Mounted

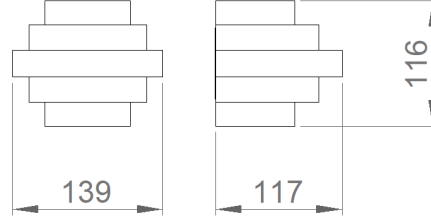

Order Code	W	Lm	CCT	CRI	WxLxH (mm)
06604.11.30.004	6	400	3000	Ra>80	139x116x117
06604.11.40.005	6	500	4000	Ra>80	139x116x117

