

*Görseldeki ürün uzunluğu 850mm' dir

# EDGE


# 06159


## IP54 Surface Mounted Wall Sconce

Edge is a modern wall sconce solution for architectural surfaces with its sloping geometric form and surface mounting. Thanks to its opal diffuser, it distributes light homogeneously, creating comfortable and balanced lighting. With its DKP sheet metal body and IP54 protection class, it offers resistance to dust and moisture, making it suitable for both indoor and protected outdoor applications.

Preferred in corridors, entrance areas, stairwells, hotels, residential projects, and social spaces, Edge adds an aesthetic touch to architectural lighting projects with its simple design, ease of surface mounting, and modern appearance.

RAL 9016 RAL 9005 RAL 9006

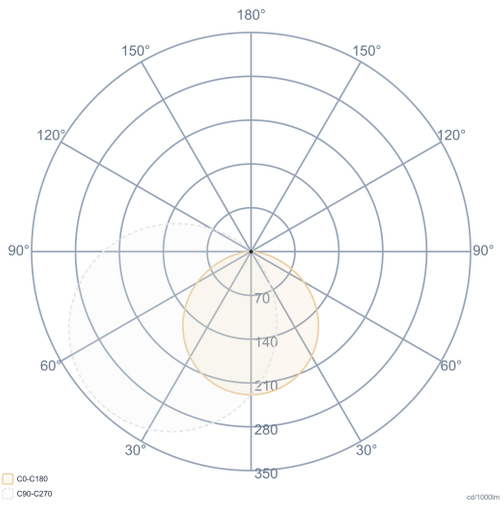

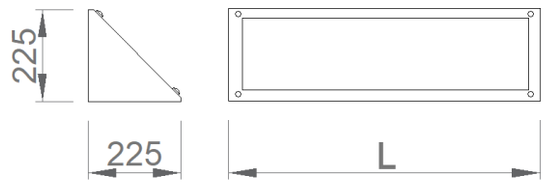
| General Information | |
|---|---|
| **Meterial** | DKP Metal Sheet |
| **Optics** | Opal Diffuser |
| **Paint** | Electrostatic Powder Paint |
| **Insulation Class** | Class I |
| **Product Dimensions [mm]** | 225[W] x 220-430-850[L] x 225[H] |
| **Mounting Type** | Surface |
| **Mounting Part** | Screw Dowel Set |

| Electrical Info | |
|---|---|
| **Power** | 20-60W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 115° |
| **UGR Value** | UGR ≤ 19 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |

| Order Code | W | Lm | CCT | WxLxH (mm) |
|---|---|---|---|---|
| 06159.22.30.017 | 20 | 1700 | 3000 | 225x200x225 |
| 06159.22.40.018 | 20 | 1800 | 4000 | 225x200x225 |
| 06159.22.30.034 | 40 | 3400 | 3000 | 225x430x225 |
| 06159.22.40.035 | 40 | 3520 | 4000 | 225x430x225 |
| 06159.22.30.048 | 60 | 6350 | 3000 | 225x850x225 |
| 06159.22.40.050 | 60 | 6380 | 4000 | 225x850x225 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com