

# Running

Continuous Lighting System - Running



## TECHNICAL INFORMATION

**Housing** Electrostatic Powder Coated Aluminum Profile  
**Optics** High Light Transmittance Optical Lens

## OPTICAL SPECIFICATIONS

**Light Distribution** Symmetrical  
**Light Output Angle** 90°  
**UGR Value** UGR ≤ 19  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL



**Power (W)** 53-65W  
**Power Factor** >0.95  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC/ 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +40°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

DALI  
Emergency Kit (1h/3h)

## ASSEMBLY

**Installation Type** Surface Mounted, Pendant

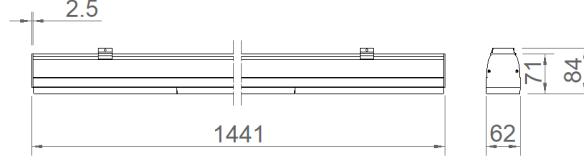

| Order Code                | W  | Lm    | CCT  | CRI   | WxLxH (mm) | Kg  |
|---------------------------|----|-------|------|-------|------------|-----|
| 72038.15.30.085           | 65 | 8530  | 3000 | Ra>80 | 62x1441x71 | 3,1 |
| 72038.15.40.089           | 65 | 8900  | 4000 | Ra>80 | 62x1441x71 | 3,1 |
| 72039.15.30.065           | 53 | 6635  | 3000 | Ra>80 | 62x1441x71 | 3,1 |
| 72039.15.40.068           | 53 | 6825  | 4000 | Ra>80 | 62x1441x71 | 3,1 |
| 72038.05.100.892.041 .DEC | 68 | 9700  | 4000 | Ra>80 | 62x1441x71 | 3,1 |
| 72038.05.110.103.141 .DEC | 79 | 11600 | 4000 | Ra>80 | 62x1720x71 | 3,7 |
| 72039.05.100.642.042 .DEC | 48 | 6400  | 4000 | Ra>80 | 62x1694x71 | 3   |
| 72039.05.100.682.042 .DEC | 52 | 7400  | 4000 | Ra>80 | 62x1417x71 | 3,6 |

