

# Running

Continuous Lighting System - Running



## TECHNICAL INFORMATION

**Housing** Electrostatic Powder Coated Aluminum Profile  
**Optics** High Light Transmittance Optical Lens

## OPTICAL SPECIFICATIONS

**Light Distribution** Symmetrical  
**Light Output Angle** 90°  
**UGR Value** UGR ≤ 19  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL



**Power (W)** 53-65W  
**Power Factor** >0.95  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC/ 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +40°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

DALI  
Emergency Kit (1h/3h)

## ASSEMBLY

**Installation Type** Surface Mounted, Pendant

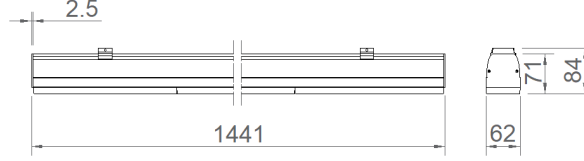

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
72038.05.100.892.041 .DEC	68	9700	4000	Ra>80	62x1441x71	3,1

