

RAL 9016 RAL 9005 RAL 9006


TIE-G

02119

Decorative Panel Lighting Fixture

Tie-G is a professional panel lighting solution developed for offices, educational institutions, healthcare facilities, and commercial spaces, featuring a metal sheet housing and flush-mounted design. Its homogeneous light distribution provides comfortable and balanced lighting, while its simple design creates a seamless look integrated with the ceiling surface.

With various power, color temperature, and control options, it adapts to project-specific lighting scenarios.

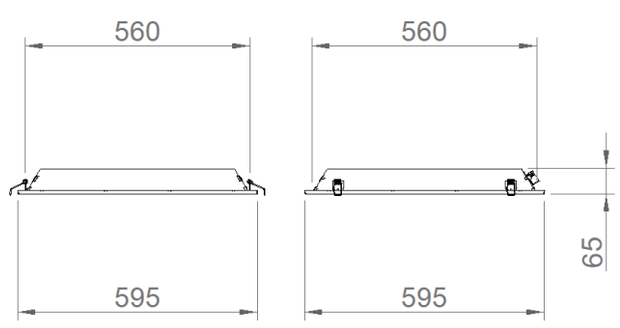

General Information		Electrical Info		Lighting Technology	
Body & Frame	Metal Sheet	**Power**	33W	**Light Output Angle**	110°
Diffuser	High Transmittance Opal Diffuser	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Paint	Electrostatic Powder Paint	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	Mc Adams ≤ 3
Insulation Class	Class I	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Product Dimensions [mm]	595(W) x 595(L) x 66(H)	**Input Voltage**	220-240V AC / 50-60 Hz		
Mounting Type		**LED Driver**	High Efficiency Constant Current Output	**Optional**	
Mounting Part		**Ambient Temperature**	-20°C / +50°C	DALI / 1-10V	
		LED Lifetime L70	>102.000 Hour	CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02119.66.30.032	33	3200	3000	Ra>80	595x595x80	575x575	4,1
02119.66.40.034	33	3200	4000	Ra>80	595x595x80	575x575	4,1

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com