

Tie-G

Indoor Lighting - Recessed Lighting



Colour Options



Ral 9016

Ral 9006

Ral 9005

TECHNICAL INFORMATION

Body & Frame Metal Sheet
Diffuser High Transmittance Opal Diffuser
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI Mc Adams ≤ 3
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 33W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-I Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor

ASSEMBLY

Installation Type Under Plaster

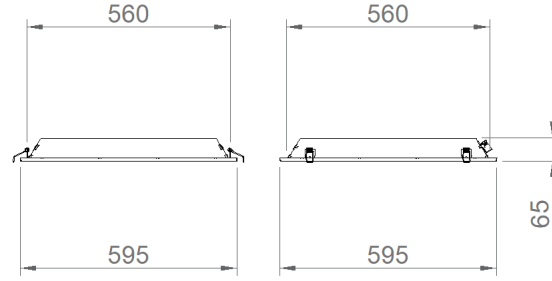

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02119.66.30.032	33	3200	3000	Ra>80	595x595x80	575x575	4,1
02119.66.40.034	33	3200	4000	Ra>80	595x595x80	575x575	4,1

