

PART-T


03149


Linear Lighting, Modern Comfort

PPart T, with its slim body and linear light windows on the front surface, reinterprets traditional lighting concepts with modern LED technology. Thanks to its surface mounting design, it creates a strong architectural impact on the ceiling while offering a simple and modern look. The light windows positioned on the front surface give the space a characteristic lighting effect, while supporting energy savings with high-efficiency LED technology.

It is ideal for offices, educational buildings, healthcare facilities, and commercial areas. It combines the ease of surface mounting with aesthetic appearance and functional lighting. With its decorative design and balanced light performance, it is a professional lighting solution for architectural projects.

RAL 9016 RAL 9005 RAL 9006

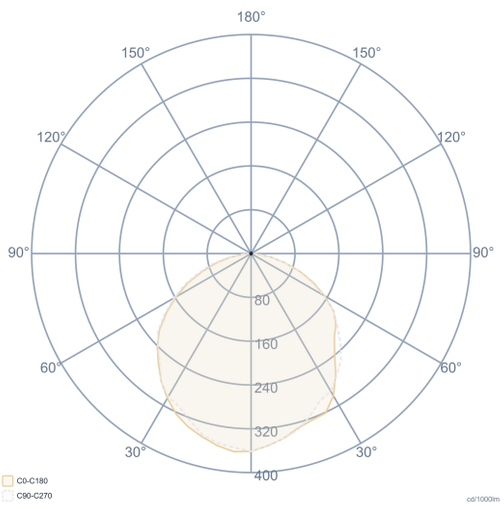

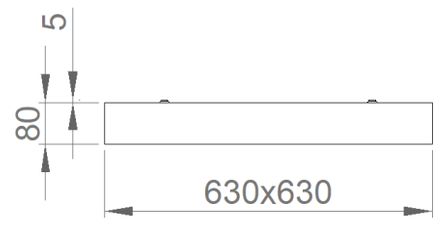

General Information	
Meterial	DKP Metal Sheet
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	630(W) x 630(L) x 80(H)
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	29-41W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
03149.66.30.023	29	2300	3000	630x630x80	4.30
03149.66.40.024	29	2450	4000	630x630x80	4.30
03149.66.30.033	41	3300	3000	630x630x70	4.30
03149.66.40.035	41	3500	4000	630x630x80	4.30

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com