

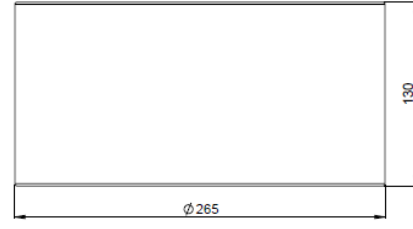


# Luna-T

Indoor Lighting - Downlight Lighting



## TECHNICAL INFORMATION

<b>Housing</b>	Electrostatic coated aluminum
<b>Optics</b>	Highly transmissive opal diffuser
<b>LED Lifetime</b>	50.000 hours
<b>L80B50</b>	
<b>Mounting System</b>	Surface

## OPTICAL SPECIFICATIONS

<b>Light Distribution</b>	Symmetrical
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	80
<b>Color Bin Value</b>	Mc Adams < 3
<b>Color Temperature (CCT)</b>	3000K/4000K

## ELECTRICAL

<b>Power (W)</b>	18-23W
<b>Power Factor</b>	>95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

## OPTIONAL

DALI  
Emergency Lighting Unit

## ASSEMBLY

**Installation Type** Surface Mounted

Order Code	W	Lm	CCT	CRI	ØxH (mm)	Kg
03170.24.30.019	19	1560	3000	Ra>80	265x130	1,2
03170.24.40.019	19	1630	4000	Ra>80	265x130	1,2
03170.24.30.029	28	2300	3000	Ra>80	265x130	1,2
03170.24.40.029	28	2400	4000	Ra>80	265x130	1,2

