

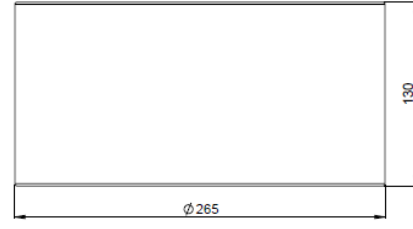


Luna-T

Indoor Lighting - Downlight Lighting



TECHNICAL INFORMATION

| | |
|------------------------|-----------------------------------|
| Housing | Electrostatic coated aluminum |
| Optics | Highly transmissive opal diffuser |
| LED Lifetime | 50.000 hours |
| L80B50 | |
| Mounting System | Surface |

OPTICAL SPECIFICATIONS

| | |
|--------------------------------|--------------|
| Light Distribution | Symmetrical |
| Light Output Angle | 120° |
| UGR Value | 80 |
| Color Bin Value | Mc Adams < 3 |
| Color Temperature (CCT) | 3000K/4000K |

ELECTRICAL

| | |
|----------------------|---------------------|
| Power (W) | 18-23W |
| Power Factor | >95 |
| Light Source | SMD Mid Power LED |
| Cabling | Halogen-Free |
| Input Voltage | 220-240V / 50-60 Hz |

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Surface Mounted

| Order Code | W | Lm | CCT | CRI | ØxH (mm) | Kg |
|-----------------|----|------|------|-------|----------|-----|
| 03170.24.30.019 | 19 | 1560 | 3000 | Ra>80 | 265x130 | 1,2 |
| 03170.24.40.019 | 19 | 1630 | 4000 | Ra>80 | 265x130 | 1,2 |
| 03170.24.30.029 | 28 | 2300 | 3000 | Ra>80 | 265x130 | 1,2 |
| 03170.24.40.029 | 28 | 2400 | 4000 | Ra>80 | 265x130 | 1,2 |

