

Sunny R

Outdoor Lighting - Urban Lighting



TECHNICAL INFORMATION

Housing	Electrostatic coated aluminum
Optics	Highly transmissive asymmetric acrylic lens
Glass	Tempered and clear
LED Lifetime	50.000 hours
L80B50	

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	70
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	4000K



ELECTRICAL

Power (W)	30-151W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

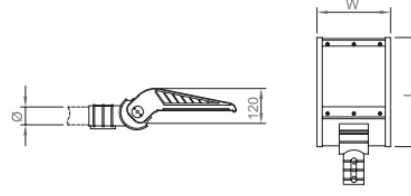

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	(Ø) (mm)	Kg
09291.15.40.036	30	3600	4000	Ra>70	152x502x138	60	3,7
09291.25.40.077	75	8625	4000	Ra>70	192x502x138	60	4,8
09291.35.40.115	100	11500	4000	Ra>70	292x502x138	60	5,8
09291.45.40.162	150	17250	4000	Ra>70	392x502x138	60	9,3

