

COMFORT-G


02145


Symmetrical Panel Luminaire with Concealed Light Source

Comfort G offers high visual comfort with its deep reflector structure and design that provides symmetrical light distribution. Thanks to the light source hidden within the reflector sheet, glare is controlled, ensuring even and homogeneous light distribution throughout the space.

With its standard 60x60cm panel size, it creates comfortable and controlled lighting, especially in offices, educational buildings, commercial areas, and general lighting applications. Its symmetrical light distribution provides effective solutions for balanced lighting requirements in work and living spaces. With its recessed mounting structure, Comfort G integrates seamlessly with the ceiling surface, offering a simple look and combining architectural aesthetics with high visual comfort, providing a functional lighting solution for modern projects.

RAL 9016 RAL 9006

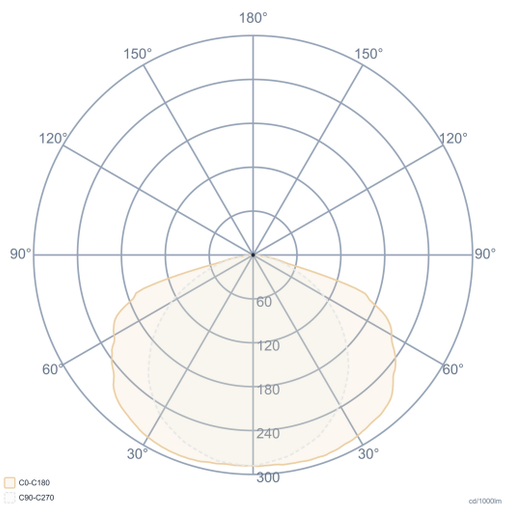

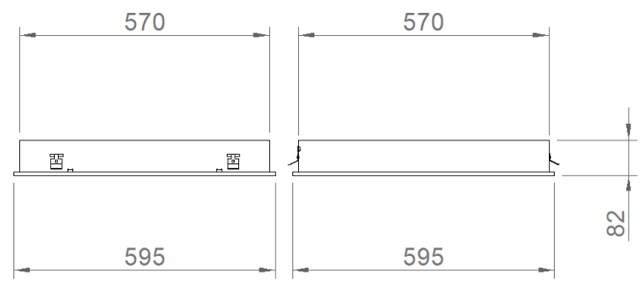

General Information		Electrical Info		Lighting Technology	
Body & Frame	DKP Metal Sheet	**Power**	27-40W	**Light Output Angle**	110°
Optics	Opal Diffuser	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 19
Paint	Electrostatic Powder Paint	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Insulation Class	Class I	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Product Dimensions [mm]	595(W) x 595(L) x 82(H)	**Input Voltage**	220-240V AC / 50-60 Hz		
Mounting Type	Recessed	**LED Driver**	Constant Current		
Mounting Part	Metal Bracket	**Ambient Temperature**	-20°C / +50°C		
		LED Lifetime L70	>102.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxHxL (mm)	Ceiling Cutting (mm)	Kg
02145.66.30.019	27	1700	3000	595x595x80	575x575	4,20
02145.66.40.020	27	1800	4000	595x595x80	575x575	4,20
02145.66.30.024	40	2630	3000	595x595x80	575x575	4,20
02145.66.40.029	40	2730	4000	595x595x80	575x575	4,20

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com