

# Wide

Indoor Lighting - Appliques



## TECHNICAL INFORMATION

**Housing** Electrostatic Powder Coated DKP Sheet  
**Optics** Opal Diffuser with High Light Transmittance  
**Paint** Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

**Light Distribution** Up&Down  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 22  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL



**Power (W)** 13-26W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** -20°C / +50°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

DALI  
Emergency Lighting Unit  
CRI > 90  
2700K ~ 6500K  
Class-II Protection Class

## ASSEMBLY

**Installation Type** Surface Mounted

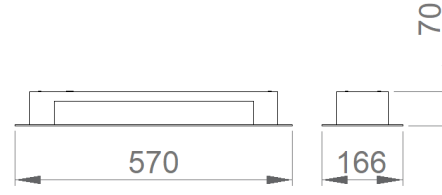

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
06144.15.30.013	13	1300	3000	Ra>80	166x570x70	3,2
06144.15.40.014	13	1400	4000	Ra>80	166x570x70	3,2
06144.15.30.026	26	2600	3000	Ra>80	166x570x70	3,2
06144.15.40.027	26	2700	4000	Ra>80	166x570x70	3,2

