



WIDE

06144

Decorative Wall Sconce with Hidden Lighting Effect

RAL 9016 RAL 9005 RAL 9006

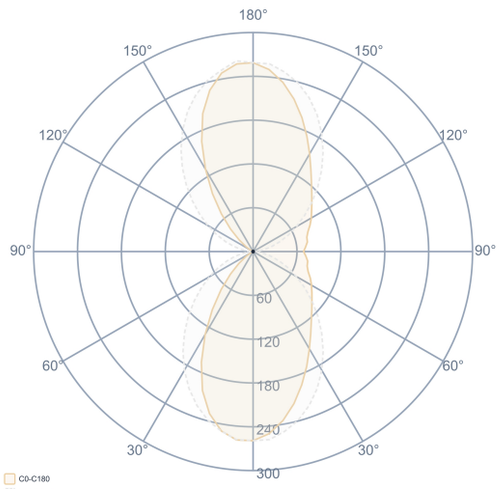

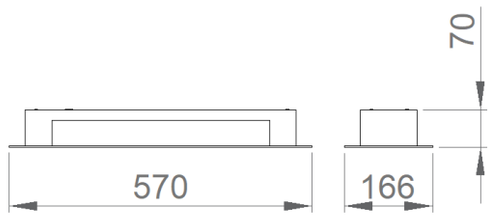

General Information	
Meterial	DKP Metal Sheet
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	166(W) x 570(L) x 70(H)
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	13-26W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Kg	Reflector Color
06144.15.30.013	13	1300	3000	166x570x70	3,20	Tek Yön
06144.15.40.014	13	1400	4000	166x570x70	3,20	Tek Yön
06144.15.30.026	26	2600	3000	166x570x70	3,20	Çift Yön
06144.15.40.027	26	2700	4000	166x570x70	3,20	Çift Yön

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com