

Sumba

Indoor Lighting - Industrial Lighting



TECHNICAL INFORMATION

Housing	Aluminum Extrusion Profile
Side Cover	PC Injection
Diffuser	Opal Diffuser
Paint	Anodized Coating
Dimensions(mm)	65(W) x 87(H)

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	130°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL


Power (W)	19-48W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Metal Bracket

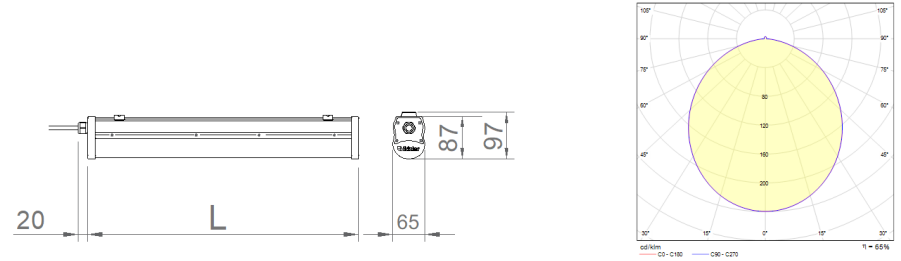

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
07102.06.30.021	19	2370	3000	Ra>80	65x600x87	1,4
07102.06.40.022	19	2450	4000	Ra>80	65x600x87	1,4
07102.09.30.022	20	2360	3000	Ra>80	65x880x87	2,0
07102.09.40.023	20	2450	4000	Ra>80	65x880x87	2,0
07102.09.30.031	29	3400	3000	Ra>80	65x880x87	2,0
07102.09.40.032	29	3740	4000	Ra>80	65x880x87	2,0
07102.09.30.042	42	4740	3000	Ra>80	65x880x87	2,0
07102.09.40.044	42	5200	4000	Ra>80	65x880x87	2,0
07102.12.30.029	29	2900	3000	Ra>80	65x1160x87	2,7
07102.12.40.030	29	3080	4000	Ra>80	65x1160x87	2,7
07102.12.30.042	40	4500	3000	Ra>80	65x1160x87	2,7
07102.12.40.043	40	4840	4000	Ra>80	65x1160x87	2,7
07102.15.30.051	48	5800	3000	Ra>80	65x1440x87	3,3
07102.15.40.053	48	6300	4000	Ra>80	65x1440x87	3,3

