

# Sumba

Indoor Lighting - Industrial Lighting



## TECHNICAL INFORMATION

<b>Housing</b>	Aluminum Extrusion Profile
<b>Side Cover</b>	PC Injection
<b>Diffuser</b>	Opal Diffuser
<b>Paint</b>	Anodized Coating
<b>Dimensions(mm)</b>	65(W) x 87(H)

## OPTICAL SPECIFICATIONS

<b>Light Distribution</b>	Symmetrical
<b>Light Output Angle</b>	130°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL



<b>Power (W)</b>	19-48W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

## ASSEMBLY

<b>Installation Type</b>	Surface Mounted, Pendant
<b>Mounting Apparatus</b>	Metal Bracket

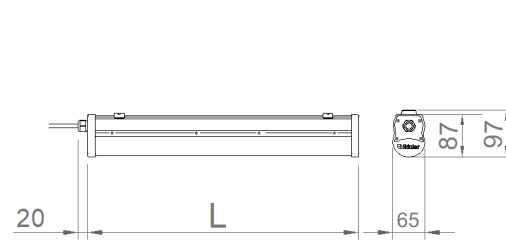

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
07102.09.40.023	20	2450	4000	Ra>80	65x880x87	2,0

