

Nest Duo - D

Indoor Lighting - Pendant Lighting



TECHNICAL INFORMATION

Housing	Extruded aluminum profile with electrostatic coating
Diffuser	Highly transmissive opal diffuser
Light Source	L80B50 High efficacy SMD Mid Power LED with > 50,000 hours lifetime
Driver	Constant current output, Pf > 0.90
Input Voltage/Input Factor	220-240V / 50-60 Hz
Working Temperature	-20C°/+40C°
Option	Dali

OPTICAL SPECIFICATIONS

Light Distribution	Direct - Indirect
Light Output Angle	120°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL




Power (W)	51-60W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI

ASSEMBLY

Installation Type Pendant

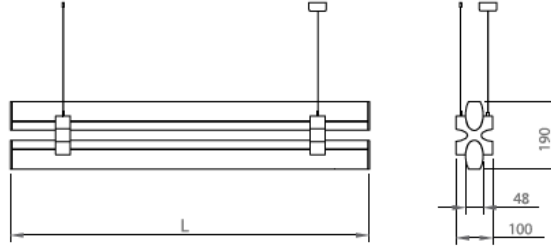

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01190.11.30.049	51	4900	3000	Ra>80	1145	3,2
01190.11.40.052	51	5200	4000	Ra>80	1145	3,2
01190.11.30.057	60	5700	3000	Ra>80	1425	4,1
01190.11.40.060	60	6050	4000	Ra>80	1425	4,1

