

# Waterline - IP54

Indoor Lighting - Linear Lighting, Industrial Lighting



## TECHNICAL INFORMATION

<b>Housing</b>	Extruded aluminum profile with electrostatic coating
<b>Diffuser</b>	Highly transmissive opal diffuser
<b>LED Lifetime</b>	50.000 hours
<b>L80B50</b>	
<b>Mounting System</b>	Surface / Pendant

## OPTICAL SPECIFICATIONS

<b>Light Distribution</b>	Symmetrical
<b>Light Output Angle</b>	75°
<b>UGR Value</b>	80
<b>Color Bin Value</b>	Mc Adams < 3
<b>Color Temperature (CCT)</b>	3000K/4000K

## ELECTRICAL





<b>Power (W)</b>	21-62W
<b>Power Factor</b>	>95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

## OPTIONAL

DALI  
Emergency Lighting Unit

## ASSEMBLY

**Installation Type** Surface Mounted, Pendant

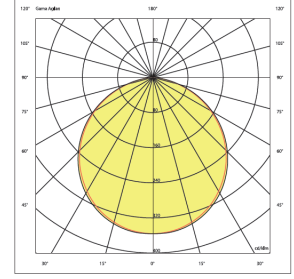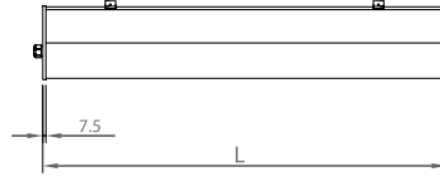

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
01193.81.30.020	21	1800	3000	Ra>80	80x590x100	2,2
01193.81.40.022	21	1900	4000	Ra>80	80x590x100	2,2
01193.81.30.030	31	2650	3000	Ra>80	80x870x100	2,5
01193.81.40.032	31	2790	4000	Ra>80	80x870x100	2,5
01193.81.30.041	42	3600	3000	Ra>80	80x1150x100	2,9
01193.81.40.043	42	3800	4000	Ra>80	80x1150x100	2,9
01193.81.30.052	52	4500	3000	Ra>80	80x1430x100	3,3
01193.81.40.054	52	4770	4000	Ra>80	80x1430x100	3,3
01193.81.30.063	62	5400	3000	Ra>80	80x1710x100	3,8
01193.81.40.065	62	5720	4000	Ra>80	80x1710x100	3,8

