

# Yuwi

Indoor Lighting - Spot Lighting



## Colour Options



## TECHNICAL INFORMATION

<b>Housing</b>	Aluminum Extruded Profile
<b>Side Cover</b>	Aluminum Injection
<b>Diffuser</b>	PC Optical Lens + Metal Light Refractor
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical / Asymmetrical
<b>Light Output Angle</b>	60° / 90° / 25°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL



<b>Power (W)</b>	28-49W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	Mid Power LED
<b>Cabling</b>	Halojen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- CRI > 90
- 2700K ~ 6500K	- Different RAL Color Options
- AC-DC Supply(MBS)	

## ASSEMBLY

**Installation Type** Ray Socket

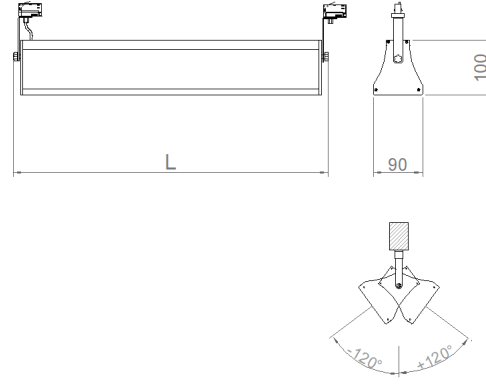

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
01196.91.30.031	28	2060	3000	Ra>80	600x90x100	2,1
01196.91.40.033	28	2070	4000	Ra>80	600x90x100	2,1
01196.91.30.046	42	4656	3000	Ra>80	900x90x100	3,1
01196.91.40.048	42	4850	4000	Ra>80	900x90x100	3,1
01196.91.30.053	49	5330	3000	Ra>80	1200x90x100	4,2
01196.91.40.055	49	5550	4000	Ra>80	1200x90x100	4,2

