

BALIO-G

02112


Panel Luminaire with Gradual Optics


Balio-G is a modern lighting fixture that stands out from classic panel luminaires with its recessed diffuser design. Its stepped optical design adds architectural depth and provides comfortable lighting.

With its standard 600x600mm dimensions and flush-mounted construction, it integrates seamlessly into suspended ceiling systems.

Developed for offices, educational buildings, healthcare facilities, and commercial spaces, Balio-G adapts to project-specific lighting needs with various power, color temperature, and control options.

RAL 9016 RAL 9006

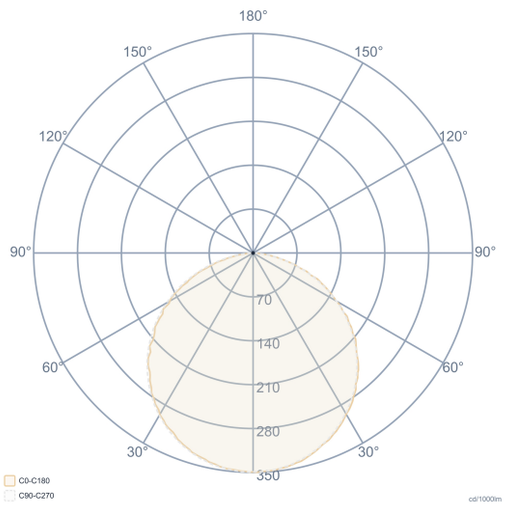

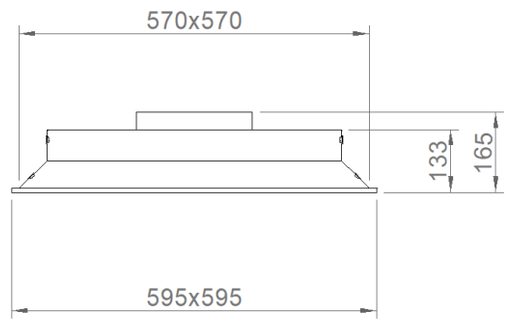

General Information	
Body & Frame	DKP Metal Sheet
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	595(W) x 595(L) x 165(H)
Mounting Type	Metal Suspended Ceiling
Mounting Part	Metal Bracket

Electrical Info	
Power	28-33W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
02112.66.30.032	28	3200	3000	595x595x140	3.20
02112.66.40.033	28	3350	4000	595x595x140	3.20
02112.66.30.036	33	3600	3000	595x595x140	3.20
02112.66.40.037	33	3700	4000	595x595x140	3.20

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com