

Nest - R

Indoor Lighting - Pendant Lighting



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Reflector	Glare Controlled Optics
Paint	Electrostatic Powder Paint
Dimensions(mm)	48(W) x 80(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	36°
UGR Value	UGR ≤ 17
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL




Power (W)	32-41W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Emergency Lighting Unit	- CRI > 90
- 2700K ~ 6500K	- Different RAL Color Options
- Plug-in Energy Input Connector	- Class-II Protection Class
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Pendant
Mounting Apparatus	Height Adjustable Steel Wire

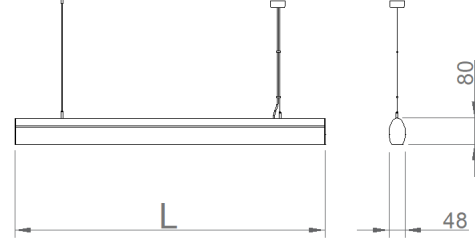

Order Code	W	Lm	CCT	Angle	CRI	L (mm)	Kg
01187.47.30.034	32	3270	3000	36°	Ra>80	1125	1,8
01187.47.40.037	32	3440	4000	36°	Ra>80	1125	1,8
01187.47.30.044	41	4150	3000	36°	Ra>80	1440	2,3
01187.47.40.047	41	4300	4000	36°	Ra>80	1440	2,3

