

# Nest - R

Indoor Lighting - Pendant Lighting



## Colour Options



## TECHNICAL INFORMATION

<b>Housing</b>	Extruded Aluminum Profile
<b>Side Cover</b>	Aluminum Injection
<b>Reflector</b>	Glare Controlled Optics
<b>Paint</b>	Electrostatic Powder Paint
<b>Dimensions(mm)</b>	48(W) x 80(H)

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Light Output Angle</b>	36°
<b>UGR Value</b>	UGR ≤ 17
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL




<b>Power (W)</b>	32-41W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Emergency Lighting Unit	- CRI > 90
- 2700K ~ 6500K	- Different RAL Color Options
- Plug-in Energy Input Connector	- Class-II Protection Class
- AC-DC Supply(MBS)	

## ASSEMBLY

<b>Installation Type</b>	Pendant
<b>Mounting Apparatus</b>	Height Adjustable Steel Wire

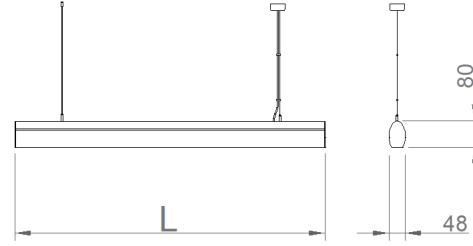

Order Code	W	Lm	CCT	Angle	CRI	L (mm)	Kg
01187.47.30.044	41	4150	3000	36°	Ra>80	1440	2,3

