
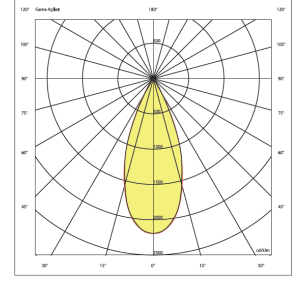


Styled-W

Indoor Lighting - Spot Lighting

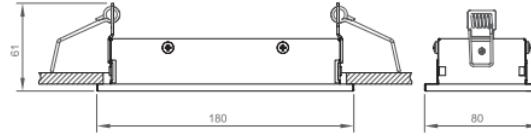

Order Code	W	Light Source	Lm	CCT	Angle	WxLxH (mm)	Ceiling Cutting (mm)
05249.18.30.013	9	Power LED	970	3000	36°	80x180x61	170x70
05249.18.40.015	9	Power LED	1020	4000	36°	80x180x61	170x70

TECHNICAL INFORMATION

Housing	Electrostatic coated steel sheet
Reflector	Highly efficient vacuumed aluminum coated PC reflector and deglaring diffuser combined with thermoplastic reflector
LED Lifetime	50.000 hours
L80B50	
Mounting System	Recessed

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	36°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL

Power (W)	9W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Under Plaster

