

RAL 9016 RAL 9005 RAL 9006

SNOW IP54/40

05393


High-Performance IP54/40 - Downlight Fixture


The Snow Series is a professional downlight solution that combines durability, aesthetics, and high performance with its aluminum injection-molded body and frame structure. Thanks to its simple design and homogeneous light distribution, it offers comfortable lighting in offices, shops, hotels, educational institutions, and commercial spaces.

The seal detail used between the body and frame provides IP40 and IP54 protection options, while its robust construction and high-quality materials ensure long-lasting performance.

Available in Ø90, Ø150, Ø190 and Ø230mm diameter options to meet various ceiling height and lighting needs.

CE IK02 GLOW WIRE 650°C IP54 IP40 RoHS COMPLIANT

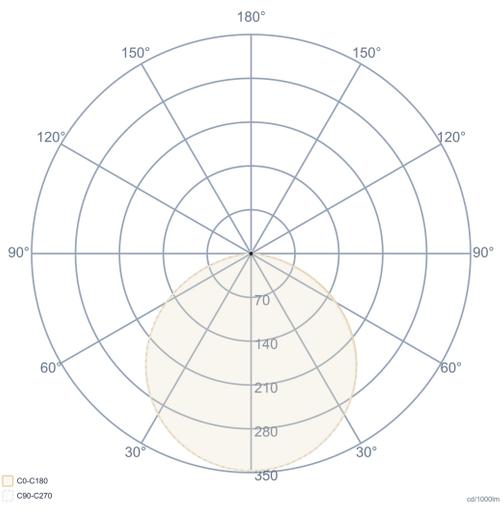

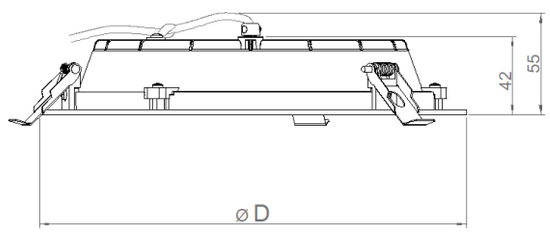

General Information	
Body & Frame	Aluminum Injection
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class II
Product Dimensions [mm]	Ø94-Ø150-Ø190-Ø230
Mounting Type	Recessed
Mounting Part	Steel Spring

Electrical Info	
Power	8W-30W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit
External IP54 Driver Box

Order Code	W	Lm	CCT	ØD (mm)	Cut-out dimensions (mm)	Kg
05393.09.30.007	8	600	3000	Ø94	Ø85	0,25
05393.09.40.008	8	650	4000	Ø94	Ø85	0,25
05393.15.30.013	13	1310	3000	Ø150	Ø140	0,40
05393.15.40.014	13	1450	4000	Ø150	Ø140	0,40
05393.15.30.018	19	1850	3000	Ø150	Ø140	0,40
05393.15.40.019	19	2050	4000	Ø150	Ø140	0,40
05393.19.30.020	19	1980	3000	Ø190	Ø180	0,60
05393.19.40.025	19	2200	4000	Ø190	Ø180	0,60
05393.19.30.023	23	2430	3000	Ø190	Ø180	0,60
05393.19.40.026	23	2700	4000	Ø190	Ø180	0,60
05393.23.30.028	26	2930	3000	Ø230	Ø215	0,80
05393.23.40.030	26	3250	4000	Ø230	Ø215	0,80
05393.23.30.030	30	3380	3000	Ø230	Ø215	0,80
05393.23.40.035	30	3750	4000	Ø230	Ø215	0,80

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com